



PASS & SEYMOUR® Specification Grade Receptacles Decorator 15 & 20A, 125V

26242, 26342

The standard for commercial Decorator receptacles.

Plated, corrosion-resistant straps, rugged nylon faces, and triple-wipe power contacts mean these receptacles will ensure consistent performance. Tri-drive, backed-out terminal screws save installation time.



FEATURES & BENEFITS

.032 inch thick, brass, triple-wipe power contacts for lasting retention.


Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.

Tri-drive steel terminal screws.

Auto-ground eliminates the necessity to terminate grounding conductor to device.

Two drive screws anchor strap to back body and face where abrupt removal torque is strongest.

Corrosion-resistant, plated steel strap locked in to face and back body to resist pulling away from face/body assembly.

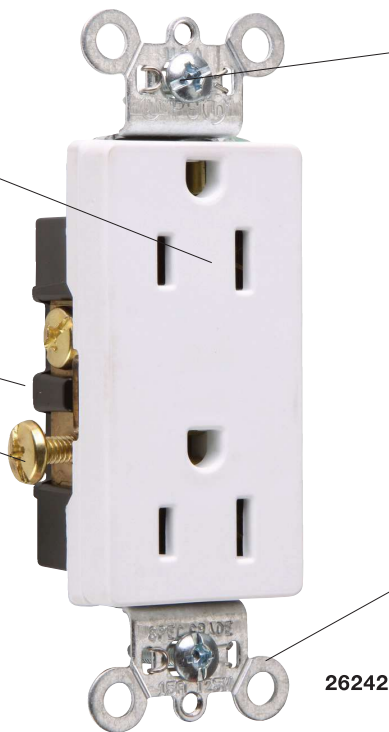

26242

FIELD USES/VERTICAL MARKETS

- Retail
- Hospitality/Lodging
- Multiple Dwelling
- Office



PASS & SEYMOUR®

Specification Grade Receptacles Decorator 15 & 20A, 125V

ORDERING INFORMATION

Catalog Number	Rating		Color	NEMA Config. No.
	A.	V.		
Duplex Receptacles Back & Side Wire				
26242I	15	125	Ivory	5-15R
26242W	15	125	White	5-15R
26242	15	125	Brown	5-15R
26242GRY	15	125	Gray	5-15R
26242BK	15	125	Black	5-15R
26242RED	15	125	Red	5-15R
26242LA	15	125	Light Almond	5-15R
26342I	20	125	Ivory	5-20R
26342W	20	125	White	5-20R
26342	20	125	Brown	5-20R
26342GRY	20	125	Gray	5-20R
26342BK	20	125	Black	5-20R
26342RED	20	125	Red	5-20R
26342LA	20	125	Light Almond	5-20R



NEMA
5-15R



NEMA
5-20R

For more information on these and other P&S products refer to our Catalog or visit our web site.

PASS & SEYMOUR®

Specification Grade Receptacles

Decorator 15 & 20A, 125V



TECHNICAL SPECIFICATIONS

3rd Party Compliance

UL Listed, File Number E140596, Standard UL498.
 Federal Specification WC596.
 CSA/CUL approved, File Number LR16063, Standard CSA-C22.2 No. 42.

Performance

Electrical


Dielectric Voltage	Withstands 2000V minimum
Maximum Working Voltage	250V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current

Mechanical

Terminal Identification	Terminal Identification in accordance with UL498 (Brass, White, Green)
Terminal Accommodation	#14 AWG – #10 AWG copper conductor only
Product Identification	Ratings are a permanent part of the device

Environmental

Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C (without impact)

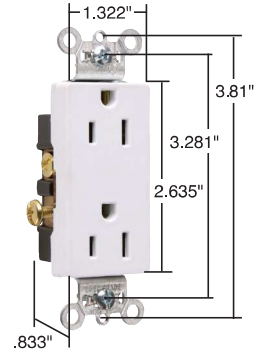

Dimensions for
15 & 20 Amp

Materials

Face	Nylon	Terminal Screws	#8 Tri-Drive Steel (Neutral = Nickel-Plated Steel)
Back Body	PVC	Ground Screw	#8 Hex Tri-Drive Steel
Line Contacts	.032 688 Brass	Assembly Drive Screw	Zinc-Plated Steel
Mounting Strap	.042 Zinc-Plated Steel	Auto-Ground Clip	Stainless Steel
Ground Contacts	.040 260 Brass	Mounting Screws	Tri-Drive Steel

Warranty

1 Year

For more information on these and other P&S products refer to our Catalog or visit our web site.

ALSO AVAILABLE...

- Hospital Grade Devices
- Ground Continuity Monitoring (GCM)
- Turnlok® Locking Devices
- IEC 309 Industrial Products
- SPD & Isolated Ground Devices
- Straight Blade Plugs & Connectors
- Weatherproof Boxes & Covers
- Flexcor® Wire Mesh Grips



Electrical Wiring Systems

P.O. Box 4822
Syracuse, NY 13221-4822
Phone: 1.800.776.4035
www.legrand.us/passandseymour

570 Applewood Crescent
Vaughan, Ontario L4K 4B4
Phone: 905.738.9195
www.legrand.ca