



Codes/Standards Applicable

- ANSI Z124.1.2
- CSA B45 Series

Whirlpool Tub Showers:

- UL1795
- ASME A112.19.7
- CSA C22.2 No. 218.3-93
- CSA B45.10

KEY BENEFITS

Easy front installation system
One-piece look and ample storage space
Optional grab bars and wood reinforcement

STANDARD FEATURE(S)

4-piece gelcoated fiberglass tub shower with wall surround
Two large top corner shelves
Above-the-floor rough
13.5" deep sump
18 3/8" apron
Left or right-hand drain
Color-matched 12" standard towel bar
Delivered in boxes
Tub can be ordered without walls

COMMON OPTIONS

12" Handle in Chrome or Brushed Nickel
18 in. Modern Horizontal Straight Grab Bar on Back wall
18 in. Modern Vertical Straight Grab Bar on Left wall
18 in. Modern Vertical Straight Grab Bar on Right wall

24 in. Modern Horizontal Straight Grab Bar on Back wall
24 in. Modern Vertical Straight Grab Bar on Left wall
24 in. Modern Vertical Straight Grab Bar on Right wall
Back wall for KDTS 3060, KDTS 3260, KDS 3060 and KDS 3460
Back Wall reinforcement for future grab bar installation
Factory-installed in-line heater
Left wall reinforcement for future grab bar installation
MVPMP - pump opposite std. location
Pre-assembled unit
Right wall reinforcement for future grab bar installation
Side walls (right and left) for KDTS 3260
Tile Adaptor (for tub only installation)
Tub only KDTS 3260 AFR with pin system
Tub only KDTS 3260 AFR without pin system

MASSAGE SYSTEM(S)

Homestead Whirlpool w/Air Switch
Tub only with pin system with Homestead Whirlpool w/Air Switch
Tub only without pin system with Homestead Whirlpool w/Air Switch

Colors

Standard Gelcoat Colors



White 002 Biscuit 007 Bone 004

Non-Standard Gelcoat Colors



Black 015 Fawn Beige 054 Ice Grey 017 Innocent Blush 066 Mexican Sand 053 Sandbar 143 Sterling Silver 006

Colors shown are for reference purposes only and are subject to change without notice. Exact matches are not possible with your monitor display or printing method used.

Model Specifications, Options and Accessories

No	Model	Dimensions in. (mm)	Approx. Weight lb (kg)	PKG ft3 (m3)
142013-000	4-piece tub shower above-the-floor rough 142013-R-000 Right-hand drain 142013-L-000 Left-hand drain	59 3/4 X 32 X 81 3/4 Door opening: 56 1/2 x 63 1/8	152	105
142015-000	Tub only with AFR without pin system (for use with alternate wall material) 142015-R-000-XXX Right-hand drain 142015-L-000-XXX Left-hand drain	59 3/4 X 32 X 21 1/2	52	28

Homestead Whirlpool System

No	Description	Dimensions in. (mm)	Approx. Weight lb (kg)	PKG ft3 (m3)
142013-058	Tub shower with HOMESTEAD WHIRLPOOL w/AIR SWITCH 142010-R-058-XXX Right-hand drain 142010-L-058-XXX Left-hand drain	59 7/8 X 32 X 81 3/4	N/A	105
	Tub only with pin system with HOMESTEAD WHIRLPOOL w/AIR SWITCH 142010-R-058-XXX Right-hand drain 142010-L-058-XXX Left-hand drain	59 3/4 X 32 X 21 1/2		28
	Tub only without pin system with HOMESTEAD WHIRLPOOL w/AIR SWITCH 142010-R-058-XXX Right-hand drain 142010-L-058-XXX Left-hand drain			

SECTIONAL SHOWER COMPONENTS

No	Description	Dimensions in. (mm)	Approx. Weight lb (kg)	PKG ft3 (m3)
142017-000	Tub only with AFR without pin system 142017-R-000-XXX Right-hand drain 142017-L-000-XXX Left-hand drain	59 3/4 X 32 X 21 1/2	52	28
142051-000	Side walls (right and left) for KDTS 3260	21 7/8 X 1 1/2 X 60	40	3.4
142061-000	Back wall for KDTS 3060, KDTS 3260, KDS 3060 and KDS 3460	59 7/8 X 10 1/8 X 60	60	29

(Continued on next page)

Common Options

✓	No	Description	Dimensions in. (mm)	Approx. Weight lb (kg)	PKG ft3 (m3)
☐	OPT20197	Left Wall reinforcement for future grab bar installation	N/A	N/A	N/A
☐	OPT20198	Right Wall reinforcement for future grab bar installation			
☐	OPT20199	Back Wall reinforcement for future grab bar installation			
☐	OPT20200	Pre-assembled unit			
☐	OPT10109	12" Handle in metallic finish Available finishes: Chrome (084) and Brushed Nickel (105)	23 X 1 1/4		
☐	OPT20203-B-XXX	18 in. Modern Horizontal Straight Grab Bar on Back wall. Available colours: White (002), Chrome (084) and Brushed Nickel (105)			
☐	OPT20203-R-XXX	18 in. Modern Vertical Straight Grab Bar on Right wall. Available colours: White (002), Chrome (084) and Brushed Nickel (105)			
☐	OPT20203-L-XXX	18 in. Modern Vertical Straight Grab Bar on Left wall. Available colours: White (002), Chrome (084) and Brushed Nickel (105)			
☐	OPT20204-B-XXX	24 in. Modern Horizontal Straight Grab Bar on Back wall. Available colours: White (002), Chrome (084) and Brushed Nickel (105)	29 X 1 1/4		
☐	OPT20204-R-XXX	24 in. Modern Vertical Straight Grab Bar on Right wall. Available colours: White (002), Chrome (084) and Brushed Nickel (105)			
☐	OPT20204-L-XXX	24 in. Modern Vertical Straight Grab Bar on Left wall. Available colours: White (002), Chrome (084) and Brushed Nickel (105)			

Whirlpool Options

✓	No	Description	Dimensions in. (mm)	Approx. Weight lb (kg)	PKG ft3 (m3)
☐	OPT10172	Factory-Installed In-Line Heater	N/A	N/A	N/A
☐	OPT10174	MVPMP - Pump Opposite Std. Location			



Accessories

✓	No	Description	Dimensions in. (mm)	Approx. Weight lb (kg)	PKG ft3 (m3)
☐	10024636-XXX	Tile Adaptor (for tub only installation) Available colors: White (002), Bone (004), Biscuit (007)	4 X 2 X 59	10	2.9


Shower doors

✓	No	Description
☐	138920	Opulence - two-panel frameless sliding door 56 - 60 in.
☐	136302	Decor Plus - two-panel sliding door 56 3/4 in.
☐	138350	Cottage Gate™ 59" - two-panel frameless sliding door
☐	138340	Vibe - two-panel frameless sliding door 54 - 59 1/2 in., 5 MM
☐	138360	Sky™ 59" - two-panel frameless sliding door
☐	105411	Session™ 59" - two-panel frameless sliding door
☐	104031	Canvas™ - two-panel frameless sliding door 5 MM
☐	105495	Vine - two-panel frameless sliding door 54 - 59 1/2 in., 6 MM
☐	105477	Filigree™ - two-panel frameless sliding door 54 - 59 1/2 in. 6 MM
☐	105482	Gondola™ - two-panel frameless sliding door 54 - 59 1/2 in. 10 MM
☐	105478	Luminous™ - two-panel frameless sliding door 54 - 59 1/2 in.




STANDARD

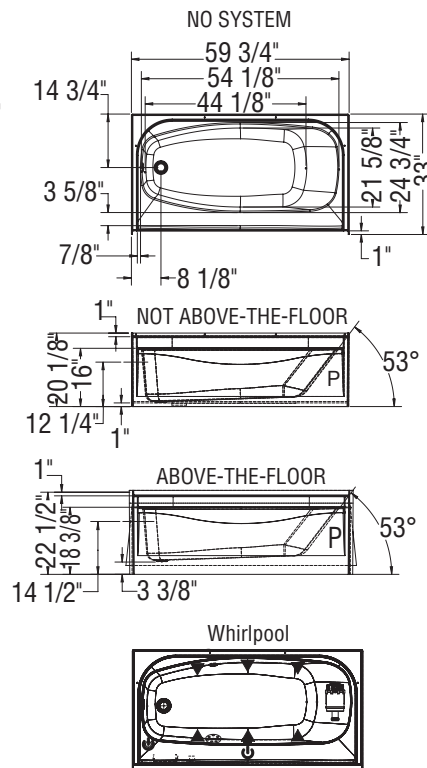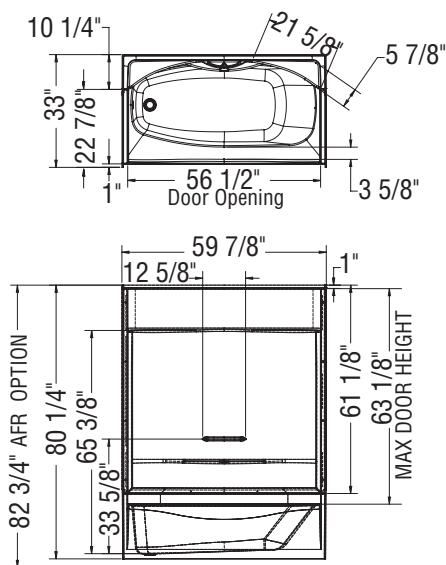

REINFORCEMENT BACKING

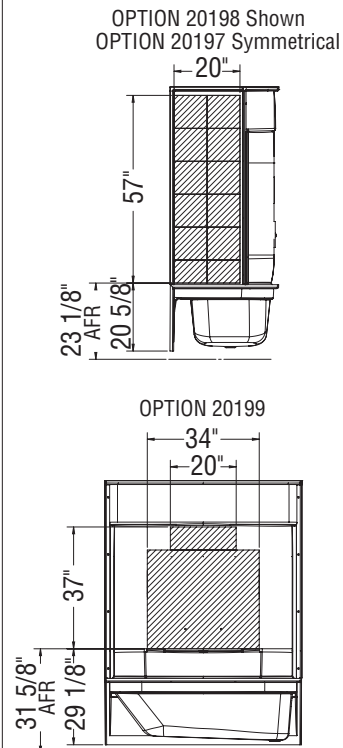

GRAB BARS

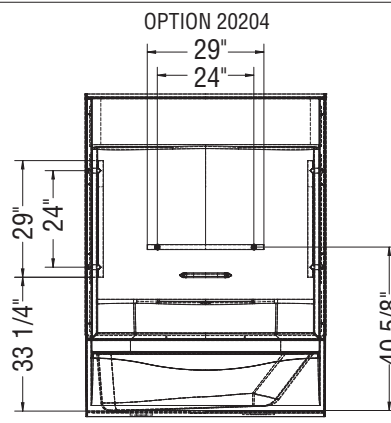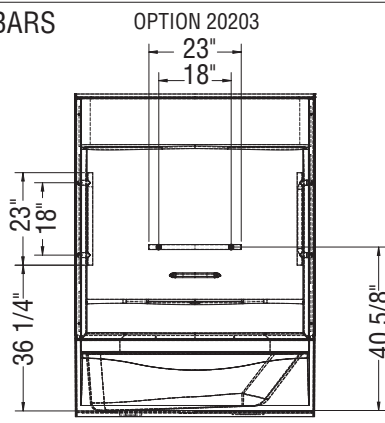

- (▲): Indicates Whirlpool jets positioning
(△): Indicates suction positioning

Here are the electrical specifications for all AKER bathtub and tub shower therapeutic systems offered in the United States.

PLEASE NOTE THAT SOME SYSTEMS MAY NOT BE AVAILABLE ON THE PRODUCT YOU HAVE SELECTED.

Please refer to the *Common Options* and *Massage System(s)* sections for more details.

HOMESTEAD	
Pump: Requires a dedicated circuit protected by a Class A GFCI.	
Heater: Requires a dedicated circuit protected by a Class A GFCI.	
Pump	3/4HP / 120V / 7.5A / 60Hz
Heater	1500W / 120V / 12.5A / 60Hz

BODYWRAP	
Pump: Requires a dedicated circuit protected by a Class A GFCI.	
Heater: Requires a dedicated circuit protected by a Class A GFCI.	
Pump	1HP / 120V / 9A / 60Hz
Heater	1500W / 120V / 12.5A / 60Hz

Installation Note

Install this product according to the *Installation Guide*.

All electrical wiring must be done per national/local electrical codes.