

SUBMITTAL SHEET

807-2 Small Diameter Series

APOLLOXPRESS® Press End Copper Street Elbow
90° FTGxC (½" through 2")



Job Name:	
Job Location:	
Engineer:	
Contractor:	
Tag:	
PO Number:	
Representative:	
Wholesale Distributor:	



DESCRIPTION

The APOLLOXPRESS® 807-2 Small Diameter Press Street Elbow features a Lead-Free dezincification resistant copper body and an EPDM O-Ring. Our Small Diameter APOLLOXPRESS® products are manufactured utilizing proven ASTM materials and standards. Proudly Made In The USA.

FEATURES

- Lead-Free Construction
- Leak-Before-Press Technology
- Compatible with Pro-Press™ Pressing Tools
- Approved for underground installation (per local installation code)
- Use with hard/soft ASTM B88 K, L & M Copper Tube
- Made in USA
- cUPC® Compliant
- ARRA Compliant

PERFORMANCE RATING

- Maximum Pressure: 200 psi
- Temperature Range: 0°F to 250°F depending on application. Hot Water up to 250°F, Chilled Water down to 33°F

APPROVALS

- NSF/ANSI NSF 61 – Water Quality
- NSF/ANSI NSF-372 – Lead Free (LF)
- IAPMO File Listings: 4861, 6174 & N-4951

APOLLOXPRESS

- Small Diameter Sizes ½" through 2"
- Model 807-2, 90° Street Elbow FTG x C

STANDARD MATERIALS

Part Name	Material
Body	UNS C12200 Copper
O-Ring	EPDM
Lubrication	Silicone, ANSI/NSF-61 Listed


DIMENSIONS

Item No.	Description	Dimension (in.)									(lb.)
		A	B	C*	D**	E***	F**	Height	Width	Depth	
10075566	807-2 ¼ FTGxC	1.80	2.38	0.76	0.73	0.97	1.91	2.38	1.80	0.95	0.11
10075568	807-2 ¾ FTGxC	2.37	2.82	0.93	1.01	1.06	2.20	2.82	2.37	1.24	0.21
10075046	807-2 1 FTGxC	2.87	3.56	0.92	1.40	1.13	2.81	3.56	2.87	1.49	0.31
10075072	807-2 1¼ FTGxC	3.64	3.85	1.09	1.87	1.19	2.97	3.85	3.64	1.75	0.43
10075074	807-2 1½ FTGxC	4.14	4.40	1.31	2.02	1.36	3.34	4.40	4.14	2.11	0.72
10075076	807-2 2 FTGxC	5.12	5.56	1.51	2.56	1.56	4.27	5.56	5.12	2.58	1.06

* Tolerance +/- .045"

** Tolerance +.09 / -.03

*** Tolerance +.06 / -.00

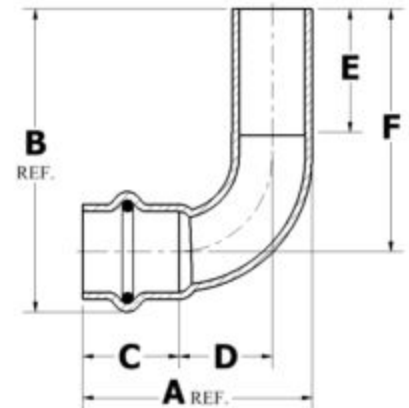

Elkhart Products Corporation
1255 Oak Street, Elkhart, IN 46514
www.elkhartproducts.com | (574) 264-3181

This specification is provided for reference only. Elkhart Products Corporation reserves the right to change any portion of this specification without notice and without incurring obligation to make such changes to Elkhart products previously or subsequently sold.

