



Dimensions

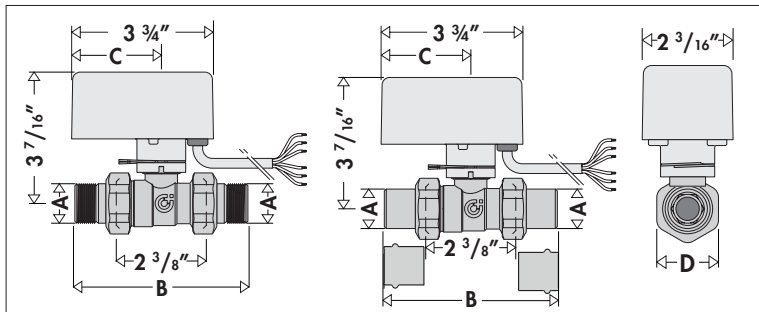


Code	A	B	C	D	Wt (lb)
644249A	1/2" sweat	3 7/8"	2 3/8"	1 7/16"	2.3
644259A	3/4" sweat	4 7/16"	2 3/8"	1 7/16"	2.3
644269A	1" sweat	5 9/16"	2 3/8"	1 1/2"	2.3
644246A	1/2" press	4 3/4"	2 3/8"	1 7/16"	2.4
644256A	3/4" press	4 3/4"	2 3/8"	1 7/16"	2.4
644266A	1" press	5 1/4"	2 3/8"	1 1/2"	2.4
644240A	1/2" NPT	4 5/8"	2 3/8"	1 7/16"	2.3
644250A	3/4" NPT	4 5/8"	2 3/8"	1 7/16"	2.3
644260A	1" NPT	5 1/4"	2 3/8"	1 1/2"	2.3

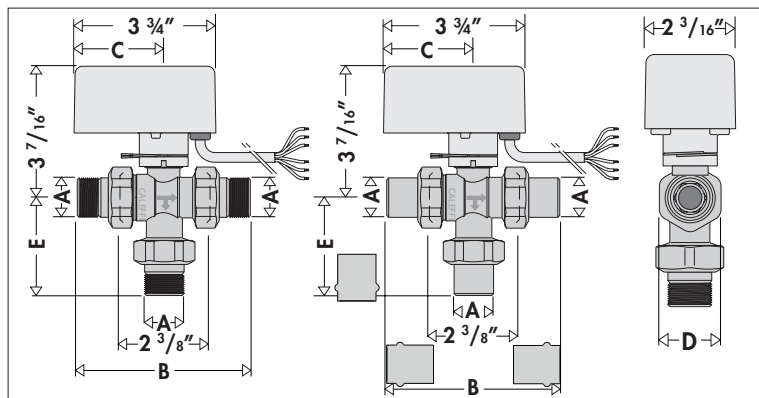


Code	A	B	C	D	E	Wt (lb)
644349A 3BY	1/2" sweat	4 5/8"	2 3/8"	1 7/16"	2 5/16"	2.5
644359A 3BY	3/4" sweat	4 5/8"	2 3/8"	1 7/16"	2 5/16"	2.5
644369A 3BY	1" sweat	5 1/4"	2 3/8"	1 1/2"	2 5/8"	2.5
644346A 3BY	1/2" press	4 3/4"	2 3/8"	1 7/16"	2 1/2"	2.6
644356A 3BY	3/4" press	5 1/16"	2 3/8"	1 7/16"	3 1/8"	2.6
644366A 3BY	1" press	5 1/4"	2 3/8"	1 1/2"	2 5/8"	2.6
644340A 3BY	1/2" NPT	3 7/8"	2 3/8"	1 7/16"	1 7/8"	2.5
644350A 3BY	3/4" NPT	4 7/16"	2 3/8"	1 7/16"	2 1/8"	2.5
644360A 3BY	1" NPT	5 9/16"	2 3/8"	1 1/2"	2 3/4"	2.5

6442 series 2-way

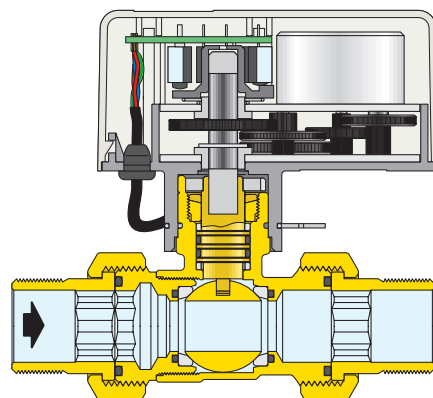


Actuator is in OPEN position with brown wire powered.

6443.. 3BY code, 3-way by-pass version

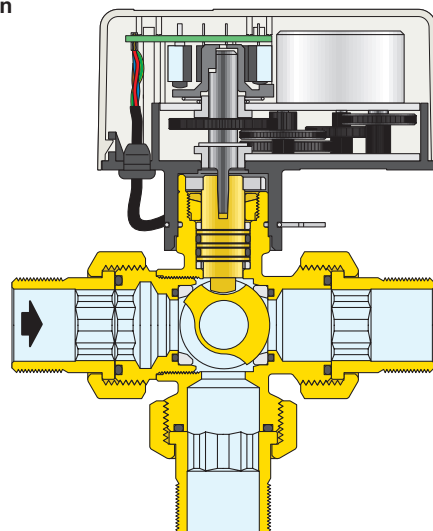


Actuator is in CLOSED position with black wire powered.

Dimensions

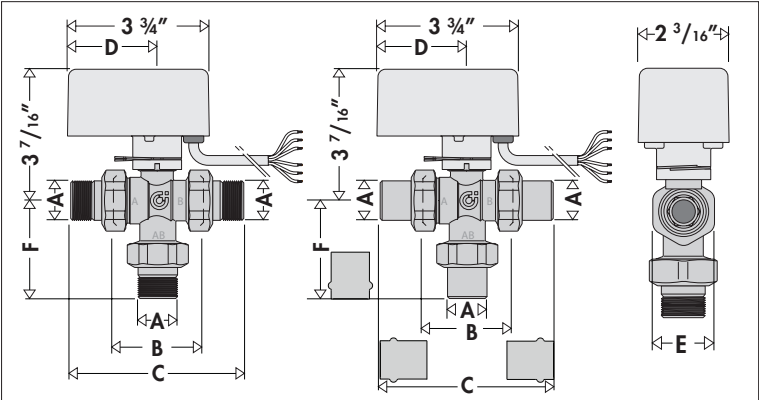

Code	A	B	C	D	E	F	Wt (lb)
644349A	1/2" sweat	2 3/8"	4 5/8"	2 3/8"	1 7/16"	2 5/16"	2.5
644359A	3/4" sweat	2 3/8"	4 5/8"	2 3/8"	1 7/16"	2 5/16"	2.5
644369A	1" sweat	3 1/16"	6 1/4"	2 3/8"	1 7/8"	3 1/4"	2.5
644346A	1/2" press	2 3/8"	4 3/4"	2 3/8"	1 7/16"	2 1/4"	2.6
644356A	3/4" press	2 3/8"	5 1/16"	2 3/8"	1 7/16"	3 1/8"	2.6
644366A	1" press	3 1/16"	5 1/4"	2 3/8"	1 7/8"	2 5/8"	2.6
644340A	1/2" NPT	2 3/8"	3 7/8"	2 3/8"	1 7/16"	1 7/8"	2.5
644350A	3/4" NPT	2 3/8"	4 7/16"	2 3/8"	1 7/16"	2 1/8"	2.5
644360A	1" NPT	3 1/16"	5 9/16"	2 3/8"	1 7/8"	2 3/4"	2.5

3-way 6443.. code, diverter version

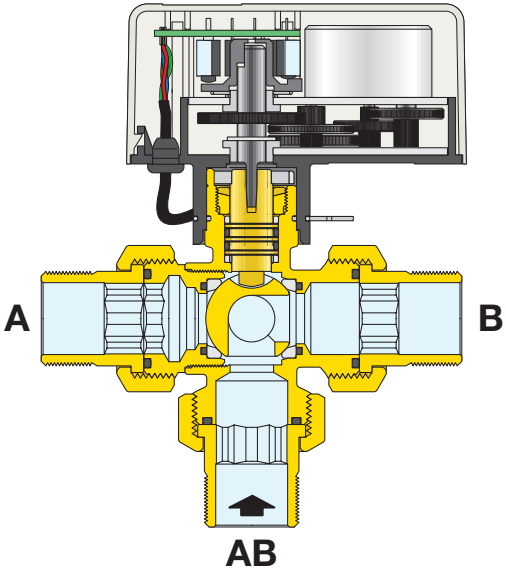

Actuator is in CLOSED position with black wire powered.