


Edge-lit Wafer

4" & 6" Baffle & Smooth
CCT Field Adjustable



| 50K-Hour Lifespan | Size | Equivalent | Wattage | Lumens ¹ | Efficacy ¹ | Beam Angle | Case Qty. | Color Temp. |
|-------------------|--------|------------|---------|-----------------------------|----------------------------|------------|-----------|-------------|
| | 90 CRI | 4" | 60W | 9W | BAFFLE: 600 SMOOTH: 650 | 72.2 | 120° | 6 |
| | 6" | 75W | 13W | BAFFLE: 950 SMOOTH: 1000 | 75.0 | 120° | 6 | |



New construction or remodel




1. Numbers are nominal

ACCESSORIES

| | Catalog Number | Description |
|--|-------------------------|--|
| | DLPLATE/WFR3468/NB | Mounting plate with nailer bar for Wafer 3"/4"/6"/8" |
| | DLPLATE/T ² | DL Plate for T-Grid ceilings |
| | DLPLATE/SJ ³ | DL Plate for stud/joist |
| | EXTCBL-FA-20 | 20FT Extension cable |
| | EXTCBL-FA-12 | 12FT Extension cable |
| | EXTCBL-FA-6 | 6FT Extension cable |

2. Except 3" 3. Except 3", 8"

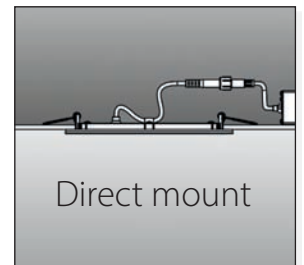

Direct mount

Specifications

Edge-lit Design Allows for extremely thin fixture depth for any ceiling application

Remote Driver Minimizes installation height and lengthens fixture life

Driver Box Includes 4 7/8" knockouts & can accommodate 4 No. 12AWG insulated wire

LEDs Provide high performance with a 90+ CRI value

CCT Selectable Choose between 5 color temperatures with integrated switch


Frosted Lens Polycarbonate construction, diffuses light evenly and smoothly

Finish Matte White. Chip, scratch and fade-resistant polyester powder coat.

Retention Clips Spring-loaded tabs ensure the fixture is securely installed

Emergency Back Up Available with separate external driver accessory

Dimensions

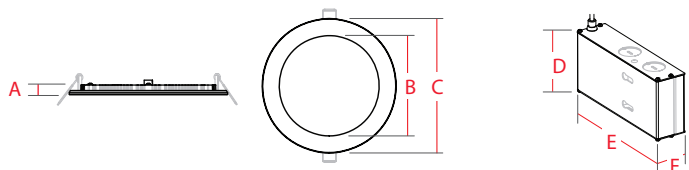

| LED Module | A | B | C |
|------------|--------|-------|---------|
| 4" Smooth | 1/2 | 3 1/8 | 4 3/4 |
| 4" Baffle | 1 1/16 | 3 3/8 | 4 3/4 |
| 6" Smooth | 1/2 | 5 | 6 13/16 |
| 6" Baffle | 1 1/16 | 5 | 6 13/16 |

| Driver Box | D | E | F |
|------------|---|-------|-------|
| 4" Smooth | 3 | 4 1/2 | 1 1/4 |
| 4" Baffle | 3 | 4 1/2 | 1 1/4 |
| 6" Smooth | 3 | 4 1/2 | 1 1/4 |
| 6" Baffle | 3 | 4 1/2 | 1 1/4 |

Measurements in inches

Ordering information

| Family | Size | Shape | Wattage | CRI | CCT | Voltage | Finish | Trim |
|----------------|--------------|-------|--|------|---|---------|--------|----------------------|
| WFRL | | R | | 9 | FA | 120 | W | |
| Edge-lit Wafer | 4 4" 6 6" | Round | 9 9W ⁴ 13 13W ⁵ | 9 90 | FA 2700K ⁶ 3000K ⁶ 3500K ⁶ 4000K ⁶ 5000K ⁶ | 120V | White | B Baffle S Smooth |

4. Only available for 4" models. 5. Only available for 6" models. 6. Field adjustable CCT.