

Temporary Power

Temporary Industrial Lighting

LED Worklights



Features

- Easy, portable LED light fixture
- 360 degree beam angle
- Wire cage and Polycarbonate design for durability

Ordering Information

| Description                        | UPC Number   | Catalog Number |
|------------------------------------|--------------|----------------|
| High Bay LED light with wire guard | 783585569024 | HBLLEDHB100    |

Listings


UL Listed

Specifications

|                |               |
|----------------|---------------|
| Light Type     | LED           |
| Plug Type      | NEMA 5-15P    |
| Connector Type | NEMA 5-15R    |
| Plug Length    | 5 Feet        |
| Supply Cord    | 16/3 SJTW     |
| Light Output   | 12,000 Lumens |
| Included       | Hanging Hook  |

Performance

|                               |                 |
|-------------------------------|-----------------|
| <b>Electrical</b>             |                 |
| Input Current (A)             | 1               |
| Input Power (W)               | 100             |
| Lamp Life                     | 50,000 Hours    |
| Output                        | 120 lumens/watt |
| <b>Mechanical</b>             |                 |
| Cord                          | 18/2 18 AWG     |
| Cord Length                   | 5 ft.           |
| Enclosure                     | Poly Carbonate  |
| Lens                          | Poly Carbonate  |
| Lens Gasket                   | Silicon         |
| Mounting Bracket/Hanging Hook | Steel           |

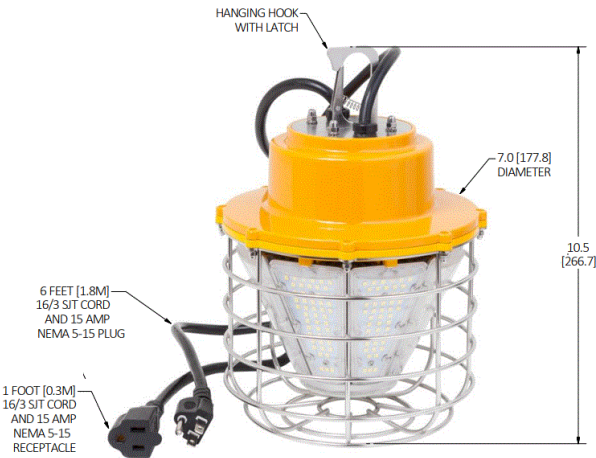

Online Resources

- Customer Use Drawing
- eCatalog
- Installation Instructions

