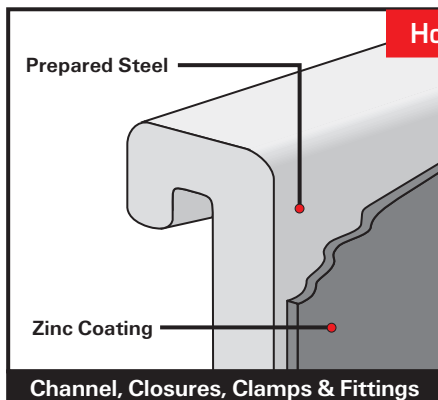


## Pregalvanized (PG)

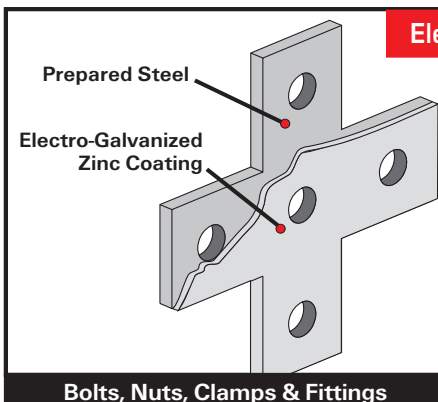
Material (steel strip) is coated with zinc by hot-dip process prior to roll-forming or press operations.

The zinc coating conforms to ASTM A653, Grade 90 General Requirement for Steel Sheet, Zinc-Coated (Galvanized) by Hot Dip Process.



## Hot-Dipped Galvanized (HG)

Material is coated with zinc after being roll-formed or after all manufacturing operations are completed, conforming to ASTM specification No. A123 or A153.




## Electro-Galvanized (EG)

Fittings and hardware are electrolytically coated with zinc to commercial standards (ASTM-B633 Type III C1).

SC1 (mild) has a Zinc coating of 0.2 and is recommended for dry indoor use. SC1 is the standard finish thickness.

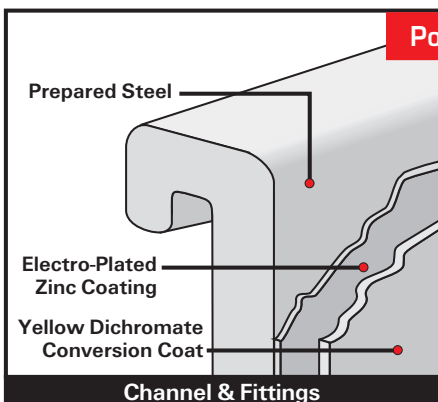SC3 (Severe) has a Zinc coating of 0.5 mill and is the standard finish thickness only on UL Listed raceway products.



## Power-Gold (ZD)

A Electro-galvanized zinc plate is applied with a cohesive molecular bond to the steel base metal, in compliance with the ASTM B633 standard. Yellow Dichromate is applied over the zinc and results in a gold appearance which acts as a nonporous barrier sealant.

SC1 (mild) has a Zinc coating of 0.2 and is recommended for dry indoor use. SC1 is the standard finish thickness

SC3 (Severe) has a Zinc coating of 0.5 mill and is the standard finish thickness only on UL Listed raceway products.

## ZINC COATING

Power-Strut products are available in four types of zinc coatings:

- Electroplated (EG)
- Pregalvanized (PG)
- Hot-Dipped Galvanized (HG)
- Yellow Dichromate (ZD)

Zinc coatings offer two types of protection:

1. **Barrier:** The zinc coating protects the steel substrate from direct contact with the environment.
2. **Sacrificial:** The zinc coating will protect scratches, cut edges, etc. through an anodic sacrificial process.



































The service life of zinc coating is directly related to the zinc coating thickness as shown below.

## COMPARISON OF ZINC GALVANIZED FINISHES



























Finish	Zinc Thickness
Hot-Dipped Galvanized	2.6 MIL
Pregalvanized	0.75 MIL
Electro-Galvanized (SC1)	0.2 MIL
Electro-Galvanized (SC3)	0.5 MIL
Power-Gold (SC1)	0.2 MIL
Power-Gold (SC3)	0.5 MIL

# PICTORIAL TABLE OF CONTENTS

## General Fittings (cont.)

						
PS 732..... 63	PS 838 R or L..... 64	PS 3282..... 64	PS 825 R or L..... 4	PS 826..... 64	PS 2404 thru PS 2408..... 64	PS 2422..... 64
						
PS 2421..... 65	PS 855..... 65	PS 2651..... 65	PS 2657..... 65	PS 2656..... 65	PS 685..... 65	PS 686..... 66
						
PS 2653..... 66	PS 907, PS 998..... 66	PS 916..... 66	PS 684..... 66	PS 2622..... 66	PS 736..... 66	PS 2623..... 67
						
PS 3201..... 67	PS 2624..... 65	PS 871..... 67	PS 858..... 67	PS 865..... 67	PS 2654 & A..... 68	PS 2626..... 68
						
PS 135X..... 67	PS 85..... 67	PS 95..... 68	PS 86..... 68	PS 93..... 68	PS 94..... 68	

## Pipe & Conduit Clamps


						
PS 1000..... 70	PS 1100 Series..... 70	PS 1300..... 70	PS 1200..... 71	PS 3138..... 72	PS 3126..... 72	PS 1450..... 72
						
PS 3792..... 75	PS 67..... 70	PS 69..... 71	PS 137..... 71	PS 51..... 72	PS 004T..... 74	PS UB..... 76
						
PS 004M..... 75	PS 270..... 72	PS 52E..... 75	PS MU..... 76	PS TP..... 73	PS CT..... 73	PS 1901..... 77
						
PS 815..... 77	PS 1911..... 77	PS 816..... 77	PS 1902..... 78	PS PP..... 78		

# BEAM CLAMPS

**Finish:** Painted Green, or Electro-galvanized **Order By:** No. and Finish **Note:** Use in pairs or with other support




## PS 95 – “C” Clamp



Rod Size	A	B	Load Rating	Wt./100 pcs
3/8"	2 5/16"	3/8"	330	35
1/2"	2 1/4"	1/2"	380	41
5/8"	2 3/8"	5/8"	450	67
3/4"	2 1/4"	1/2"	500	72

**Material:** Steel


## PS 86 – “C” Clamp



Rod Size	A	B	Load Rating	Wt./100 pcs
3/8"	1 11/16"	1 3/4"	400	38
1/2"	1 23/32"			52
5/8"	1 15/16"	2"	450	68
3/4"	2 1/32"		600	128

**Material:** Malleable Iron, Steel Set Screw

## PS 2654 & PS 2654A – Column Attachment

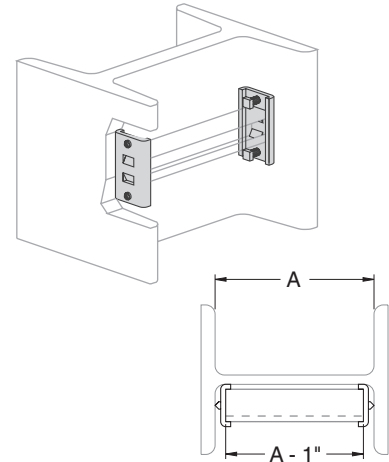

PS 2654 Use with PS 200



PS 2654A Use with PS 500

**Slip Rating:** 800 lbs.


**Note:** Column attachment can only be used in pairs.

Weight/100 pcs: 41 lbs.

## PS 93 – Universal “C” Clamp

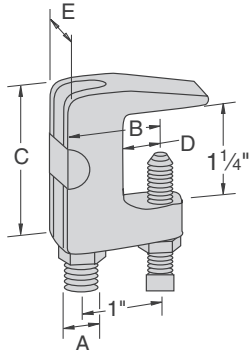

At least one full thread must be exposed





**Material:** Malleable Iron, Steel Set Screw


Part No.	Rod Size A	DIMENSIONS (Inches)				Max. Pipe Size	Max. Load (Lbs.)	Wt/100 pcs
		B	C	D	E			
PS 93 3/8	3/8	1 5/8	2	3/4	7/8	2	400	28
PS 93 1/2	1/2	1 5/8	2	3/4	7/8	3 1/2	500	34

• Maximum temperature of 450° F

## PS 94 – Wide Throat Top Beam “C” Clamp



At least one full thread must be exposed



**Material:** Malleable Iron, Steel Set Screw

Part No.	Rod Size A	DIMENSIONS (Inches)					Max Pipe Size	Max. Load (Lbs.)	Wt/100 pcs
		B	C	D	E	F			
PS 94 5/8	5/8	1 3/4	2 1/4	3/4	1 1/4	1	5	600	66
PS 94 3/4	3/4	1 7/8	2 3/8	3/4	1 3/8	1 1/4	8	800	83

• Maximum temperature of 450° F