

Standard Flex NID

The FLEX NID product family offers flexibility and can be deployed for SFU, simplifying deployment and craft interaction. The Outdoor rated compact FTTx product provides easy craft-friendly installation for SFU Fiber Connectivity. In addition to great esthetics, the product can reduce deployment time reliably.

FEATURES

FLEXIBLE LAY CABLE ENTRY SYSTEM FOR INCOMING AND OUTGOING CABLE

CABLE MEDIUM SEPARATION - THE DUAL MEDIUM RADIUS CABLE MANAGEMENT-SYSTEM ENABLES THE STORAGE AND SEPARATION OF THE OUTER JACKET IN A SEPARATE CHANNEL.


PIVOTING SPLICE TRAY CAN HOLD UP TO 8 SPLICES.

TOOLLESS CABLE CLAMP AT ENTRY PORT

MULTIFUNCTION GROUND AND STRENGTH MEMBER TIE BAR

POLE OR WALL MOUNT

CAN ACCEPT CONDUIT OR MICRODUCT

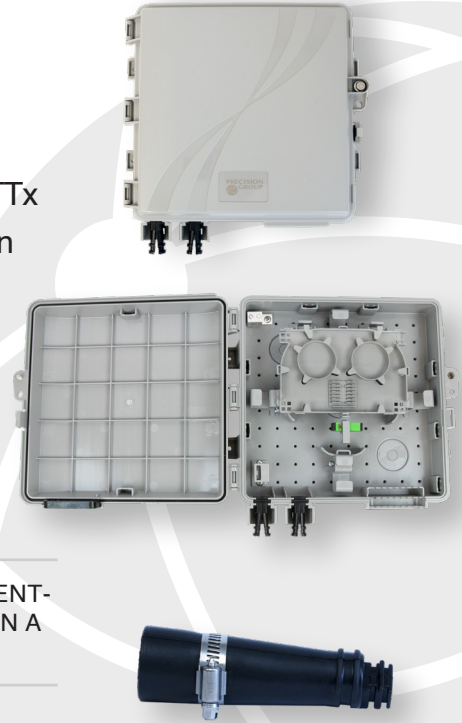

ORDERING GUIDE

PFFLEXNID-C01000000	Patch and Splice NID with SCAPC Adapter
PF-FLEXNID-C0100002	Fiber Nid Patch and Splice with conduit Grommet (PF-NIDCGM), SCAPC adapter Cable Clamp Bar bonding hardware and Splice tray.
PF-FLEXNID-C01BS00-002	Patch and Splice NID with No splitter, SCAPC connector, 1 Simplex Adapter, No pigtail, 0 tails, NID With Conduit Grommet.
PFFLEXNID-P01000000	Patch ONLY NID with SCAPC Adapter
PF-NIDCGM	Precision FLEXNID Conduit (Riser) Grommet

SPECIFICATIONS

Dimensions: 10.2 H x 10.6" W x 3" D

Materials: UL and UL 94-5VA outdoor flame retardant PBT/PC blend thermoplastic

UL1863 Performance: Designed to meet GR-049-CORE, GR-2898- CORE & GR-3125-CORE.

Adapter exceeds the requirements of GR-326-CORE.

Finish: Light Gray