

Halogen Sockets

Halogen Double Loop G9 Sockets 250V


Threaded G-9 Sockets



80-1582
Porcelain Socket
Push-In Terminals
1/8 IP Hickey Inside Extrusion
Double-Leg
1 1/2" H x 3/4" Dia.
500W-250V - 2Amp



80-1589 21" Leads
80-1590 72" Leads
Porcelain Socket w/Ring
UL 10362 Leads
1/8 IP Hickey Inside Extrusion
Double-Leg
1 3/8" H x 3/4" Dia.
500W-250V - 2 Amp

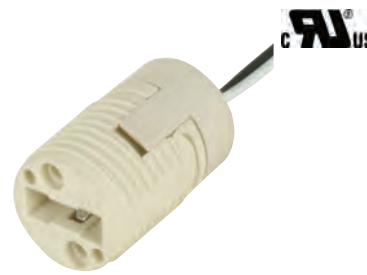

80-1500
Phenolic Socket
20" UL 10362 B/W Leads
1/8 IP Bushing
1 1/4" H x 3/4" Dia.
500W-250V

G-9 Socket Accessories



S4614
G-9 Bulb



80-1591
Tubular Borosilicate
Clear Glass w/Threads
Thickness 2.5mm
Temperature 500°C
2 1/4" H x 1" Dia.



80-1583
Chrome Ring
For Tubular Glass
3/4" Inner Dia.
1 1/16" Outer Dia.