


INCANDESCENT

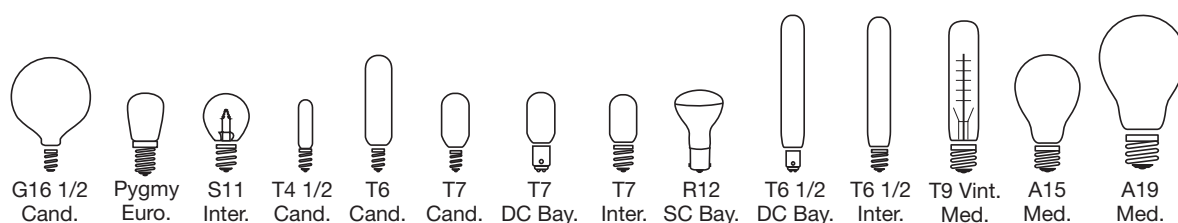

Watts	Bulb Type	Base	Satco Prod. #	Lamp Code	Volts	Finish	M.O.L. Inches	Filament	Initial Lumens	Avg. Rated Hours	Pkg. Type	Master/Inner Carton	Notes
15	G16 1/2	Cand.	S3821	15G16 1/2	120	Clear	3	C-7A	114	1500	Box	500/25	
			S3726	15G16 1/2	120	Clear	3	C-7A	114	1500	CD/2	120/10	
			S3824	15G16 1/2/W	120	Satin White	3	C-7A	94	1500	Box	500/25	
			S3752	15G16 1/2/W	120	Satin White	3	C-7A	94	1500	CD/2	120/10	
			A3921	15G16 1/2	130	Clear	3	C-7A	98	2500	Box	500/25	
			A3924	15G16 1/2/W	130	Satin White	3	C-7A	83	2500	Box	500/25	
	Pygmy	Euro.	S7939	15T8/120V/E14	120	Clear	2 ¼	C-5A	100	1000	Box	25	
			S7941	15T8/220V/E14	220	Clear	2 ¼	C-5A	100	1000	Box	25	
			S7945	15E14/130V/Oven	130	Clear	2	—	—	10000	Box	1000/50	
	S11	Inter.	S3628	15S11/N	120	Clear	2 ¾	C-7A	100	1500	Box	600/10	
	T4 1/2	Cand.	S3913	15T4 1/2/C	130	Clear	1 ½	C-7A	90	1000	Sleeve/10	10	5
	T6	Cand.	S3315	15T6/F	120	Frost	4	C-5A	90	2500	Sleeve	500/25	5
			S3715	15T6/F	120	Frost	4	C-5A	90	2500	CD/2	72/6	5
			S3910	15T6	130	Clear	3 ¼	C-5A	95	2500	Sleeve/10	120/10	
			S3912	15T6/145V	145	Clear	3 ¼	C-5A	90	2000	Sleeve/10	120/10	
	T7	Cand.	S4727	15T6/145V	145	Clear	3 ¼	C-5A	90	2000	CD/1	120/10	
			S3905	15T7C	130	Clear	2 ¼	C-5A	95	2500	Sleeve/10	120/10	
			S4718	15T7C	130	Clear	2 ¼	C-5A	95	2500	CD/1	120/12	
			S3906	15T7/DC	130	Clear	2 ¼	C-5A	95	2500	Sleeve/10	120/10	
		DC Bay.	S4719	15T7/DC	130	Clear	2 ¼	C-5A	95	2500	CD/1	120/12	
			S3911	15T7/N	130	Clear	2 ¼	C-5A	95	2500	Sleeve/10	120/10	
			S4722	15T7/N	130	Clear	2 ¼	C-5A	95	2500	CD/1	120/12	
20	R12	SC Bay.	S1383	1383	13	—	2 ¾	C-6	—	300	Box	10	
			Shatter Proof	1383/TF	13	—	2 ¾	C-6	—	300	Box	10	
	T6 1/2	DC Bay.	S3297	20T6 1/2DC	130	Clear	5 ¾	C-6	150	1500	Box	500/25	
			S3298	20T6 1/2DC/F	130	Frost	5 ¾	C-6	140	1500	Box	500/25	
		Inter.	S3280	20T6 1/2N	130	Clear	5 ¾	C-6	150	1500	Box	500/25	
			S3281	20T6 1/2N/F	130	Frost	5 ¾	C-6	140	1500	Box	500/25	
	T9	Med.	S2415	20T9/CL/120V/Vint.	120	Clear	5 ½	Hairpin	80	3000	Box	48/6	
25	A15	Med.	S3814	25A15/CL	130	Clear	3 ½	C-9	150	2500	Box	500/25	
			S3815	25A15/F	130	Frost	3 ½	C-9	150	2500	Box	500/25	
			Shatter Proof	25A15/TF	130	Frost	3 ½	C-9	120	2500	Box	500/25	4
	A19	Med.	S5010	25A19/F/12V	12	Frost	4 ¾	C-6	250	1500	Box	120/6	
			S5020	25A19/F/34V	34	Frost	4 ¾	C-6	250	1500	Box	120/6	
			S6040	25A19/CL	120	Clear	4 ¾	C-9	185	1500	2pk	120	
			S3940	25A19/CL	130	Clear	4 ¾	CC-6	170	2500	2pk	120	

NOTE: When using a 130 Volt lamp on a 120 Volt line, life is extended approximately 2.5 times and lumens are reduced approximately 20%.