

Garden Lighting – Die Cast Metal



P-3

Incandescent: 75W or 13W CFL max, Bulb not included




P-4

Incandescent: 75W or 13W CFL max, Bulb not included



Isolux Curve

Wattage	Multiplier	Wattage	Multiplier
150	1.0	50	.27
75	.68	40	.26
60	.44	25	.13

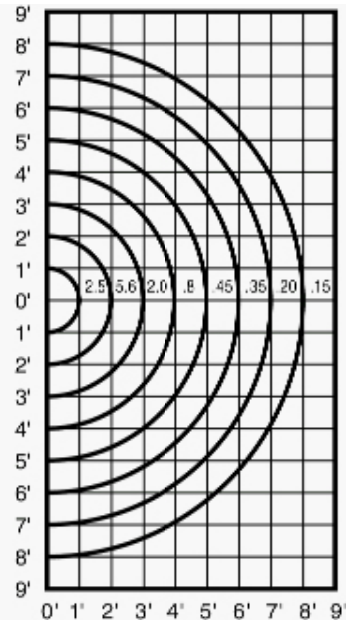

Photometrics:

Based on lamp center 24" above ground. Based on 100 Watt A-19 inside frosted 1750 lumen lamp. For other wattage see table above.



BWF Product Benefits & Features

- Rugged, seamless, die-cast construction that does not allow moisture entry
- State of the art powder coat finish for maximum durability
- Includes screw-in clear glass globe, 5" for 3-Tier, 7" for 4-Tier lights

Applications

- For accent lighting along walkways, driveways, • Lighting around pools, patios and garden areas terraces and porches
- Accent shrubbery and landscaping

Three Tier Louver Light with 5" Glass Globe

1/2" NPT base, 110/120V 75 Watt Max

BWF#	Unit UPC 0-87115	Pipe Size	Type	Description Color	Case Qty.	Case Weight
Boxed						
P-3	33005-5	1/2	3 Tier	Green	6	18
P-3AB	33510-4	1/2	3 Tier	Bronze	6	18
P-3W	33705-4	1/2	3 Tier	White	6	18
P-3B	33010-9	1/2	3 Tier	Black	6	18
LL3	00883-1	1/2	3 Tier	Green	6	18

Four Tier Louver Light with 7" Glass Globe

1/2" NPT base, 110/120V 100 Watt Max

BWF#	Unit UPC 0-87115	Pipe Size	Type	Description Color	Case Qty.	Case Weight
Boxed						
P-4	33015-4	1/2	4 Tier	Green	6	22
P-4AB	33515-9	1/2	4 Tier	Bronze	6	22
P-4W	33706-1	1/2	4 Tier	White	6	22
P-4B	33020-8	1/2	4 Tier	Black	6	22
LL4	00884-8	1/2	4 Tier	Green	6	23

