

Classic Closet Connector Housing one rack unit, holds two CCH connector panels


CORNING

Part Number: CLSSC-01U

Corning classic closet connector housings (CLSSC) provide interconnect or cross-connect capabilities between outside plant, riser or distribution cables, and optoelectronics. The housings accept closet connector housing (CCH) panels. The units are designed to reduce the risk of errors that can disrupt networks and can be mounted in 19-in (48-cm) racks or optional 23-in (58-cm) equipment racks (1.75-in EIA hole spacing).

The 1U and 2U housings can also be mounted in 23-in (58 cm) equipment racks by flipping the 19-in mounting brackets; optional 23-in extension brackets are available for the 3U and 4U housings. The 1U and 2U options feature a slide-out tray, while 3U and 4U options have a tinted polycarbonate front door and an open top at the front of the housing for easier access and jumper routing. Classic closet connector housings are compatible with CCH connector panels for multimode and single-mode applications in 6-, 8-, 12-, 16- and 24-fiber configurations. Documentation labels are provided, and components can be added as needed to construct a fiber distribution frame for any application. The units include multiple locations for jumper egress and come with the universal cable clamp for cable strain relief. All housings are compatible with a field-installable lock kit for the front door.

This CCH, introduced in 2012, was designed based on customer feedback and offers innovative features that make installation and troubleshooting fiber optic connectivity faster, easier, and more cost-effective.

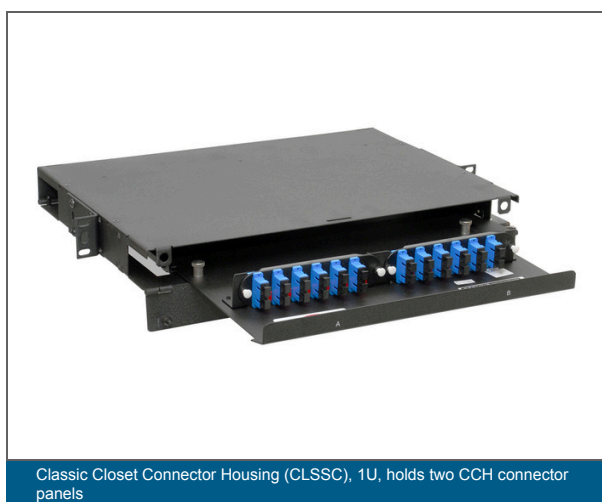

Classic Closet Connector Housing (CLSSC), 1U, holds two CCH connector panels

Features and Benefits

Durable, polycarbonate-tinted front door for viewing jumpers

Ideal for pigtail splicing

Field-installed lock kit

Security

Quality tested

Meets ANSI/TIA/EIA-568A and 606

Mounting provisions for buffer tube fan-out kits

Ideal for field connectorization

Housings have sliding tray (01U and 02U) or open top at front (03U and 04U)

Ease of access

Classic Closet Connector Housing one rack unit, holds two CCH connector panels



Specifications

General Specifications	
Product Type	Rack-Mountable Hardware
Mounting Type	Rack 19-in
Application	Data Center, Enterprise Networks

Standards	
RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Approvals and Listings	Meets ANSI/TIA/EIA-568A and 606

Design	
Housing Type	CCH
Locking Availability	Front
Number of Panels per Housing	2
Panel or Module Type	CCH
Splice Tray Options	No splice tray option

Design - Adapter	
Housing Color	Black

Dimensions	
Height	4.4 cm
Width	43 cm
Depth	305 cm

Classic Closet Connector Housing one rack unit, holds two CCH connector panels

CORNING

Ordering Information

Product Number	CLSSC-01U
EAN Code	4056418169071
Package Contents	"Classic CCH Housing 1U; Installation guide; 2 blank panels; Installation Kit; UCC Kit; #12-24 and #10-32 mounting screws, Cage Nut Mounting Kit"
Shipping Weight	8.7 kg
Width	432 mm (17.01 in)
Height Unit	1 U
Units per Delivery	1/1



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2023 Corning Optical Communications. All rights reserved.