


FEXLCSC42



OM4 LC/UPC to SC/UPC, Fiber Patch Cord, 1.6 mm Duplex, Riser

Product Classification

Regional Availability	Asia Australia/New Zealand Europe Latin America Middle East /Africa North America
Portfolio	CommScope®
Product Type	Fiber patch cord, duplex
Product Brand	SYSTIMAX InstaPATCH® 360
Ordering Note	For lengths greater than 999 ft (304 m), orders must be in meters Minimum length may vary based on cable configuration

General Specifications


Color, boot A	Aqua
Color, connector A	Beige
Color, boot B	Aqua
Color, connector B	Beige
Interface, Connector A	LC/UPC
Interface, Connector B	SC/UPC
Jacket Color	Aqua
Polarity	Method B
Total Fibers, quantity	2

Dimensions

Cable Assembly Length Range (m)	1 – 999
Cable Assembly Length Range (ft)	1 – 999
Diameter Over Jacket	1.6 mm 0.063 in

Ordering Tree

FEXLCSC42

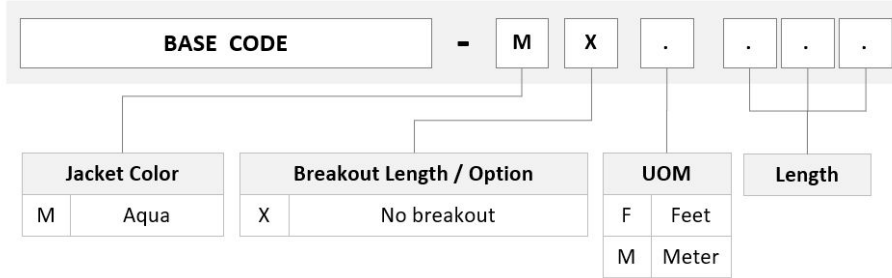

Mechanical Specifications

Cable Retention Strength, maximum 11.24 lb @ 0 ° | 4.40 lb @ 90 °

Optical Specifications

Fiber Mode Multimode

Fiber Type OM4, LazrSPEED®

Environmental Specifications

Operating Temperature -10 °C to +60 °C (+14 °F to +140 °F)

Environmental Space Riser

Regulatory Compliance/Certifications

Agency	Classification
ANATEL	Compliant
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant
UK-ROHS	Compliant



Included Products

- 460125198 – Pre-Radiused LC Connector duplex for 1.6 mm Fiber, multimode
- 460125750 – LazrSPEED® Pre-Radiused SC Connector for 1.6 mm Fiber Cordage, Duplex, multimode

FEXLCSC42

760103028
R-002-ZC-5K-F16BL

– LazrSPEED® 1.6 mm Riser Zipcord Cable