

# Pretium® Connector Housing (PCH) four rack units, holds 12 CCH connector panels

CORNING

## Part Number: PCH-04U

The rack-mount Pretium® connector housings (PCH) are available in 1U, 2U and 4U sizes and mount in 19-in racks or cabinets. Combined with the modules, panels, harnesses, trunks and jumpers, they provide a tip-to-tip solution for your fiber optic network.

## Features and Benefits

Compatible with Plug &

### Splice in the housing

Saves rack space and the cost of the second housing

### Removable top (1U, 2U)


Maximizes ease of access

### Transparent front door (04U and 02U)

Permits viewing while protecting installed patch cords

### Large removable fiber guides in front

Effectively manage high patch cord densities

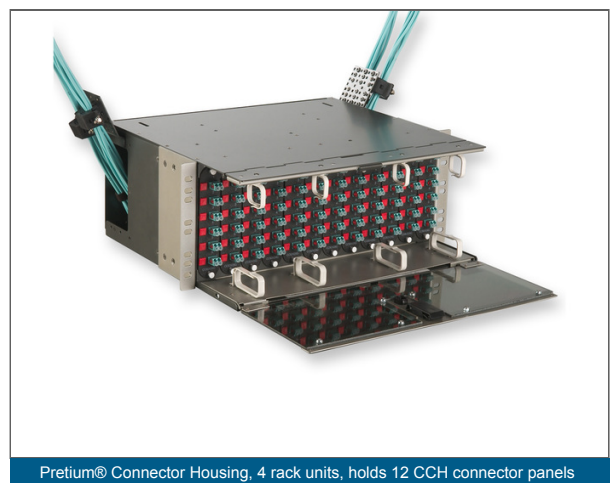

# Pretium® Connector Housing (PCH) four rack units, holds 12 CCH connector panels



## Specifications

General Specifications	
Product Type	Rack-Mountable Hardware
Accessory Type	PCH
Lockable	yes, front and rear side
Mounting Type	Rack 19-in, Rack 23-in
Application	Data Center, Enterprise Networks

Standards	
RoHS	Free of hazardous substances according to RoHS 2011/65/EU
UL-Listed	United States and Canadian safety standards

Design	
Splice Tray Type	MFT
Housing Type	PCH
Locking Availability	Front or rear
Panel or Module Type	CCH
Splice Tray Options	Splice trays can be used with optional PC4-GOV-SPLC or PC4-SPLC-12SR splice tray holder
Fiber Capacity	Up to 144 fibers installing FC/SC/ ST® compatible connectors, or up to 288 installing LC connectors

Connector Specs	
Housing Material	Metal

Ordering Information	
Product Number	PCH-04U
EAN Code	4056418200767

# Pretium® Connector Housing (PCH) four rack units, holds 12 CCH connector panels



Ordering Information	
Weight	9.2 kg
Package Contents	"Housing; installation guide; 12 blank panels; unit ID label; port identification label for 12 panels; 4 routing clips; 8 #10-32 x 50 screws; 4 #12-24 x 50 screws; 12 1/8 x 4-in tie wraps, white; 3 spiral wraps, 2 ft; central member strain-relief clamp kit; bracket for mounting UCC clamp; universal cable clamp (UCC) kit with 5 cable inserts"
Shipping Weight	7.5 kg
Width	432 mm (17.01 in)
Depth	406 mm (15.98 in)
Height	1778 mm (70 in)
Height Unit	4 U
Units per Delivery	1/1



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States  
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks). All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2023 Corning Optical Communications. All rights reserved.