



The new degree of comfort.™



Water

Residential Electric
Marathon Water Heaters

Marathon® non-metallic electric water heaters are durable, lightweight, and warranted not to leak as long as you own your home*

Non-metallic Tank Features

- Seamless, blow-molded, polybutene tank – impervious to rust and corrosion
- Multiple layers of filament wound fiberglass give the tank unmatched strength
- Polyurethane insulation helps reduce energy consumption
- Recessed drain valve is out of the way brooms and scrubbers
- High temperature polysulfone dip tube
- Tough molded polyethylene outer shell resists dents, scratches, and salt air

Efficiency

- .90 - .94 EF
- Well insulated for reduced standby heat loss
- Pipe wrap energy saving kit included to achieve maximum energy savings

Performance

- FHR: 52-104 gallons, based on gallon capacity
- Recovery rate: 20 gallons GPH at a 90 degree rise

Capacity & Dimensions

- 40, 50, 85, 105-Gallon tall models and a 50-gallon short

Easy Installation & Service

- Marathon's lightweight tank is easier to maneuver and position. Bowl shaped tank bottom drains completely.

Plus...


- Thermally fused upper element provides protection against dry-firing – titanium lower element for superior resistance to lime build-up
- Full-flow, brass drain valve
- Temperature and pressure relief valve
- Low Lead compliant
- Standard replacement parts

Warranty

- Lifetime limited warranty on tank and 6 years on parts*

*See Residential Warranty Certificate for complete information

Units meet or exceed ANSI requirements and have been tested according to D.O.E. procedures. Units meet or exceed the energy efficiency requirements of NAECA, ASHRAE standard 90, ICC Code and all state energy efficiency performance criteria.

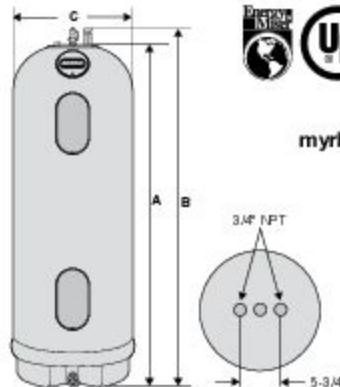

2
ProClub
POINTS

Marathon

40 to 105-Gallon Capacities
240 Volt AC/Single Phase
Electric



TLEED Point is 1

myrheem.com/proclub

TYPE	DESCRIPTION		FEATURES		ROUGHING IN DIMENSIONS (SHOWN IN INCHES)				ENERGY INFO.	
	GAL. CAP.	MODEL NUMBER	FIRST HOUR RATING G.P.H.	RECOVERY IN G.P.H. 90° F RISE	TANK HEIGHT A	HEIGHT TO WATER CONN. B	DIAMETER C	APPROX. SHIP WT. (LBS)	ENERGY FACTOR	
Tall	40	MR40245†	52	20	61-1/2	65-1/2	21-3/4	90	0.94	
Tall	50	MR50245†	61	20	62-3/4	66-3/4	23-1/2	100	0.94	
Tall	85	MR85245†	91	20	66-1/4	70-1/4	28-1/4	134	0.92	
Tall	105	MR105245†	104	20	66-3/4	70-3/4	30-1/4	152	0.91	
Short	50	MGR50245	54	20	43-1/4	47-1/4	28-1/4	95	0.90	

Energy Factor based on D.O.E. (Department of Energy) test procedures.

Water heaters furnished with standard 240 volt AC, single phase non-simultaneous wiring, and 4500 watt upper and lower heating elements. 3000 and 3500 watt elements available. If heating elements of different wattages than those shown are demanded, they must be specifically requested. For height to top of T&P and heat traps add 3-1/2" to the height to water connection. Maximum test pressure: 300 PSI. Maximum working pressure: 150 PSI.

Recovery = wattage/2.42 x temp. rise °F.
Example: 4500W = 21 GPH
2.42 x 90°

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Water Heating • 101 Bell Road
Montgomery, Alabama 36117-4305 • www.rheem.com



INTEGRATED HOME COMFORT