

Wall Heater W Series



Model Code:

W	12	10	-T2
A	B	C	D
A: Series			
B: 12 - 120V 24 - 240V			
20 - 208V			
C: Watts (500 to 2000)			
D: Thermostat (optional)			



- Nichrome Open-Coil element
- C-Frame motor
- 4-Blade aluminum fan
- Patented Smart Limit Protection®
- 20 gauge powder-coated grill
- Standard color: white
- 20 gauge electro-galvanized steel recess can
- Wall can with QuickSet™ stud alignment tabs
- Dual wattage & available in 120, 208, 240 Volts
- 1-year limited warranty



The "W" Wall Heater

The W Heater was designed to be the highest quality economy heater on the market. It is commonly used in apartment construction or as supplemental heat in single family homes. By combining an efficient impeller style fan with a NiChrome heating element, the W heater delivers instant heat in even the draftiest locations. For use with a wall thermostat or in-built thermostat. A powder-coated, surface mounted wall-can may be purchased separately. The wall can shall be 20 gauge electro-galvanized steel and contain knockouts through which power leads are brought. The wall can shall be able to mount directly to wall studs in new or existing construction. The wall can shall be provided with QuickSet™ stud alignment tabs, used for maintaining proper depth during new installation. The wall can shall be supplied with a factory installed ground wire. Clearance: 6" to a side wall, 4" from floor minimum. When the W series is installed in a WSC surface can it adds UL ratings for Wet Location Applications.

Ordering Information

	BASE MODEL	VOLTS	WATTS	AMPS	SHIP WEIGHT lbs
120V	W1210-W	120	1000 or 500	8.3 or 4.2	8
	W1210-T-W	120	1000 or 500	8.3 or 4.2	8
	W1215-W	120	1500 or 750	12.5 or 6.3	8
	W1215-T-W	120	1500 or 750	12.5 or 6.3	8
208V	W2010-W	208	1000 or 500	4 or 2.4	8
	W2015-W	208	1500 or 750	7.2 or 3.6	8
	W2020-W	208	2000 or 1000	9.6 or 4.8	8
	W2405-W	240/208*	1000 or 500	4.1 or 2.1	8
240V	W2410-W	240/208*	1000 or 500	4.1 or 2.1	8
	W2412-W	240/208*	1200 or 600	5 or 2.5	8
	W2415-W	240/208*	1500 or 750	6.25 or 3.1	8
	W2420-W	240/208*	2000 or 1000	8.3 or 4.2	8

*Dual rated heaters will draw 13% less amps and 25% less wattage when operated at 208V.

NOTE: Models W1210-T-W and W1215-T-W include a single pole thermostat


Factory Installed Options

ADD SUFFIX	DESCRIPTION	SHIP WEIGHT lbs
-W	White Color	
H	Heatbox Interior Only (No Can or Grill)	6
-T	Factory Provided Single Pole Thermostat Kit	8
-T2	Factory Provided Double Pole Thermostat Kit	8
-DS15	Factory Installed Double Pole Disconnect (10A/ 240V / 15A/120V)	8

NOTE: Not all configurations listed above are stock items (A+ or A stock code). Refer to price book for the Stock code. For non-stock items refer to the table below to order heater parts separately.

Wall Heater W Series

Dimensional Data

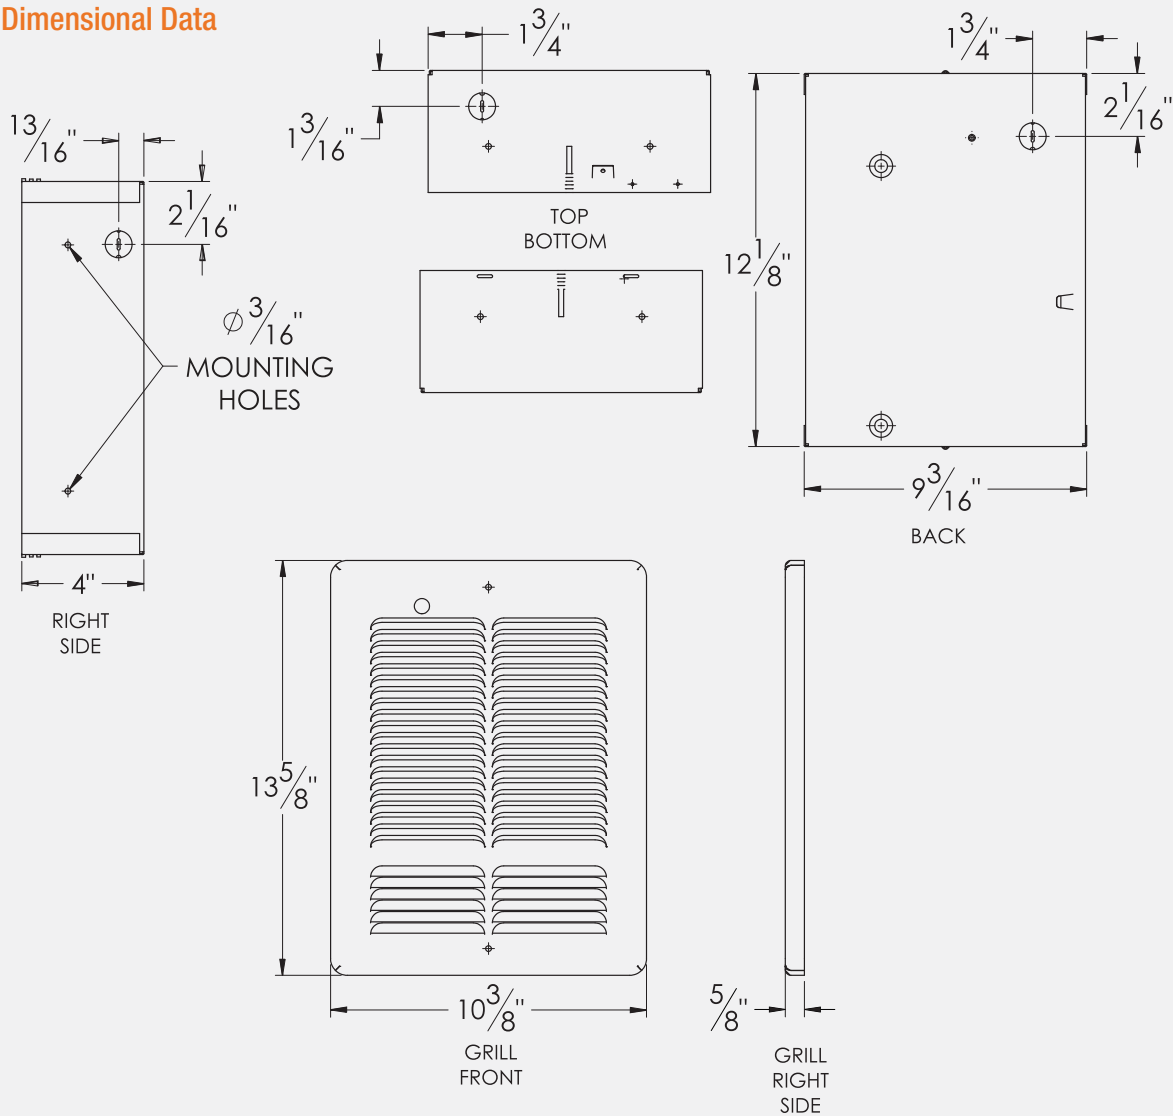


⊕ = knockout location **MINIMUM CLEARANCE:** Zero clearance to insulation 4" above floor 6" from adjacent wall

WSC



WOG

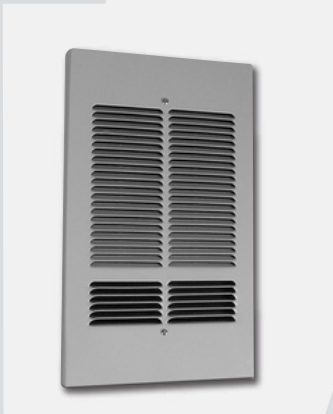

Exploded View

