


NM Strap

1 Hole



Features

- Inverted rib provides extra strength

Applications

- Securely affix cables, tubing, pipe and EMT



Standard Material

- Steel

Catalog Number	UPC	Size	Unit Carton	Ship Case	Weight/Case	A	B	C
510RX	15600	14/2, 12/2	100	1000	14	1.08	.28	.50

Cable Support

MC, NM Stud Wall

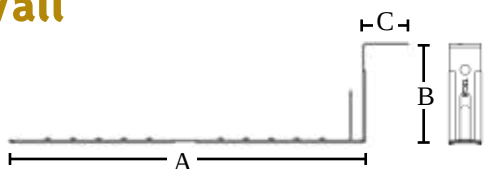

Features

- Designed with a flared edge for maximum cable protection
- Collapsible leg locks and secures cables for a snug fit
- Locating ribs to maintain cable separation
- NEC® 300.4D applicable

Applications

- Easily install and secure NM or MC cables to wood or metal studs
- Supports up to 6 runs of NM sheathed cable or 4 runs of MC and AC cables

Standard Material

- Steel

Standard Finish


- Zinc plated

Catalog Number	UPC	Unit Carton	Weight/Case	A	B	C
TZCJ6	01546	100	5	7.17	1.93	.91

Combination Couplings

Set Screw to Clamp Type - EMT to BX or NM Cable

Zinc Die Cast



Features

- Set screw to clamp type
- Combination coupling used to join NM cable to EMT

Applications

- Indoor use only
- Use to join EMT to nonmetallic sheathed cable, #14/2, #12/3 or 2 #14/2

Standard Material

- Zinc die cast
- Zinc plated steel strap

Catalog Number	UPC	Size	Unit Carton	Ship Case	Weight/Case	A	B (Min. -Max.)
180	11410	1/2" - 3/8"	50	500	40	1.35	.17 - .63