


Rigid Conduit Bodies with Cover and Gasket

Threaded C Type

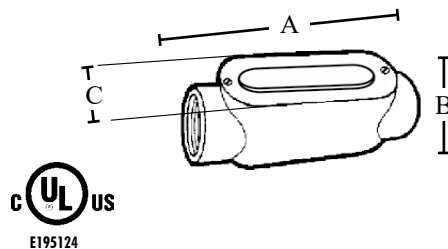

UL Standard: 514A
Fed. Spec. W-C-586D
NEMA FB 1

Features

- Threaded C type with cover and gasket
- NPT tapered hubs
- Suitable for use in concrete
- Suitable for use in wet locations

Applications

- Provides access to conductors for pulling, splicing and maintenance

Standard Material


- Copper free aluminum die cast
- Cover - Stamped steel
- Gasket - Neoprene rubber

Standard Finish

- Powder coat

Catalog Number	UPC	Size	Wire Size		Unit Carton	Ship Case	Weight/Case	A	B	C
			Max. Number	Max. Size						
C1CG	19901	1/2"	1	6 AWG	10	100	30	4.72	1.37	1.33
C2CG	19911	3/4"	2	6 AWG	10	50	25	5.57	1.625	1.54
C3CG	19921	1"	3	6 AWG	5	25	18	6.46	1.90	1.74
C4CG	19931	1-1/4"	3	2 AWG	2	10	17	8.528	2.77	2.49
C5CG	19941	1-1/2"	3	2 AWG	2	10	19	8.528	2.77	2.49
C6CG	19951	2"	3	2/0 AWG	1	5	14	10.831	3.335	3.10
C7CG	19961	2-1/2"	3	4/0 AWG	---	1	7	13.50	4.06	4.45
C8CG	19971	3"	3	250 MCM	---	1	7	13.50	4.685	4.45
C9CG	19981	3-1/2"	3	350 MCM	---	1	10	15.937	5.45	5.50
C10CG	19991	4"	4	350 MCM	---	1	10	15.937	5.45	5.50

Threaded LL Type



UL Standard: 514A
Fed. Spec. W-C-586D
NEMA FB 1

Features

- Threaded LL type with cover and gasket
- NPT tapered hubs
- Suitable for use in concrete
- Suitable for use in wet locations

Applications

- Provides access to conductors for pulling, splicing and maintenance

Standard Material

- Copper free aluminum die cast
- Cover - Stamped steel
- Gasket - Neoprene rubber

Standard Finish

- Powder coat

Catalog Number	UPC	Size	Wire Size		Unit Carton	Ship Case	Weight/Case	A	B	C
			Max. Number	Max. Size						
LL1CG	21041	1/2"	1	6AWG	10	100	36	4.295	1.37	2.03
LL2CG	21051	3/4"	2	6AWG	10	50	23	5.09	1.625	2.33
LL3CG	21061	1"	3	6AWG	5	25	19	5.915	1.90	2.65
LL4CG	21071	1-1/4"	3	2AWG	2	10	15	7.894	2.77	3.385
LL5CG	21081	1-1/2"	3	2AWG	2	10	16	7.894	2.77	3.385
LL6CG	21091	2"	3	2/0AWG	1	5	14	10.134	3.335	3.81
LL7CG	21101	2-1/2"	3	4/0AWG	---	1	7	13	4.063	5.709
LL8CG	21111	3"	3	250MCM	---	1	7	12.75	4.682	5.506
LL9CG	21121	3-1/2"	3	350MCM	---	1	10	15.50	5.452	6.171
LL10CG	21131	4"	4	350MCM	---	1	10	15.50	5.452	6.171