


SPECIFICATION SUBMITTAL SHEET

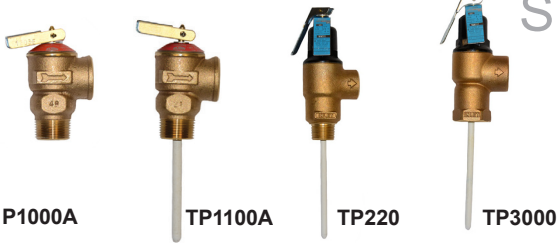

FEATURES

(T&P valve)

Probe sizes: 2" 3" 4" 5" 8"

OPTIONS

E - Model TP1100AE extended body

ACCESSORIES

- Expansion tank (Model XT or WXTP)
- Water pressure reducing valve (Model NR3XL)
- Vacuum Relief Valve (Model VR10)
- Expansion control ball valve (Model BVEC)

APPLICATION

Designed for installation on potable water heating storage vessels to protect against over-temperature or excessive pressure. (Not for steam service)


STANDARDS COMPLIANCE

(See below for applicable models and pressure settings)


- CSA Compliance to ANSI Z21.22/CSA 4.4
- Certified to ASME Section IV by National Board

MATERIALS


Main valve body Cast Brass or Bronze, ASTM B 584
 Internals Stainless Steel, 300 Series
 Brass, ASTM B 36 and B 16
 EP, Silicone
 Springs Stainless Steel, ASTM A 313
 Probes Epoxy Coated copper tube, FDA approved




P1000A



TP1100A



TP220



TP3000



DIMENSIONS & WEIGHTS (do not include pkg.)

MODEL NUMBER	DISCHARGE RATES				RELIEF TEMP F	DIMENSIONS											
	PRESS. RELIEF SETTING PSI	ANSI Z21.22/ CSA 4.4 BTU/HR	ASME SECTION IV BTU/HR	F		INLET	OUTLET	A		B		C		D		E	
								in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
P1000A-30C	30	-	500,000	N/A	3/4 MNPT	3/4 FNPT	1-1/4	32	1-5/8	41	1-13/16	46	n/a	-	1-3/16	30	
P1000A-75C	75	-	300,000	N/A	3/4 MNPT	3/4 FNPT	1-1/4	32	1-5/8	41	1-13/16	46	n/a	-	1-3/16	30	
P1000A-125C	125	200,000	500,000	N/A	3/4 MNPT	3/4 FNPT	1-1/4	32	1-5/8	41	1-13/16	46	n/a	-	1-3/16	30	
P1000A-150C	150	200,000	500,000	N/A	3/4 MNPT	3/4 FNPT	1-1/4	32	1-5/8	41	1-13/16	46	n/a	-	1-3/16	30	
TP1100A-2C-150C	150	95,000	500,000	210	3/4 MNPT	3/4 FNPT	1-1/4	32	1-5/8	41	3-3/16	81	1-5/16	33	1-3/16	30	
TP1100A-4C-75C	75	105,000	300,000	210	3/4 MNPT	3/4 FNPT	1-1/4	32	1-5/8	41	4-7/8	124	3-3/32	79	1-3/16	30	
TP1100A-4C-125C	125	105,000	500,000	210	3/4 MNPT	3/4 FNPT	1-1/4	32	1-5/8	41	4-7/8	124	3-3/32	79	1-3/16	30	
TP1100A-4C-150C	150	105,000	500,000	210	3/4 MNPT	3/4 FNPT	1-1/4	32	1-5/8	41	4-7/8	124	3-3/32	79	1-3/16	30	
TP1100A-4C-175C	175	95,000	-	210	3/4 MNPT	3/4 FNPT	1-1/4	32	1-5/8	41	4-7/8	124	3-3/32	79	1-3/16	30	
TP1100A-8C-150C	150	105,000	500,000	210	3/4 MNPT	3/4 FNPT	1-1/4	32	1-5/8	41	9-3/4	248	7-7/8	200	1-3/16	30	
TP1100AE-3C-150C	150	105,000	500,000	210	3/4 MNPT	3/4 FNPT	1-1/4	32	1-5/8	41	4-7/8	124	2-1/8	54	2-3/32	53	
TP220-5C-125C	125	205,000	1,619,000	210	3/4 MNPT	3/4 FNPT	1-1/2	38	3-15/32	88	6-7/8	175	4-7/16	113	1-3/4	45	
TP220-5C-150C	150	205,000	1,912,000	210	3/4 MNPT	3/4 FNPT	1-1/2	38	3-15/32	88	6-7/8	175	4-7/16	113	1-3/4	45	
TP220-8C-150C	150	205,000	1,912,000	210	3/4 MNPT	3/4 FNPT	1-1/2	38	3-15/32	88	10-1/8	257	7-11/16	196	1-3/4	45	
TP3000-5C-75C	75	500,000	1,165,000	210	1 FNPT	1 FNPT	1-9/16	40	3-1/2	89	6-7/8	175	4-3/4	121	1-5/16	34	
TP3000-5C-100C	100	500,000	1,495,000	210	1 FNPT	1 FNPT	1-9/16	40	3-1/2	89	6-7/8	175	4-3/4	121	1-5/16	34	
TP3000-5C-125C	125	500,000	1,825,000	210	1 FNPT	1 FNPT	1-9/16	40	3-1/2	89	6-7/8	175	4-3/4	121	1-5/16	34	
TP3000-5C-150C	150	500,000	2,155,000	210	1 FNPT	1 FNPT	1-9/16	40	3-1/2	89	6-7/8	175	4-3/4	121	1-5/16	34	
TP3000-8C-125C	125	750,000	3,070,000	210	1 FNPT	1 FNPT	1-3/4	44	4-3/8	111	9-1/4	235	8-5/32	207	5/16	8	
TP3000-8C-150C	150	750,000	3,625,000	210	1 FNPT	1 FNPT	1-3/4	44	4-3/8	111	9-1/4	235	8-5/32	207	5/16	8	

DOCUMENT #: TP-TP&P-C REVISION: 8/12

TYPICAL INSTALLATION

Local codes shall govern installation requirements. Unless otherwise specified, the relief valve shall be installed in accordance with manufacturer's instructions and the latest edition of the Uniform Plumbing Code ®.

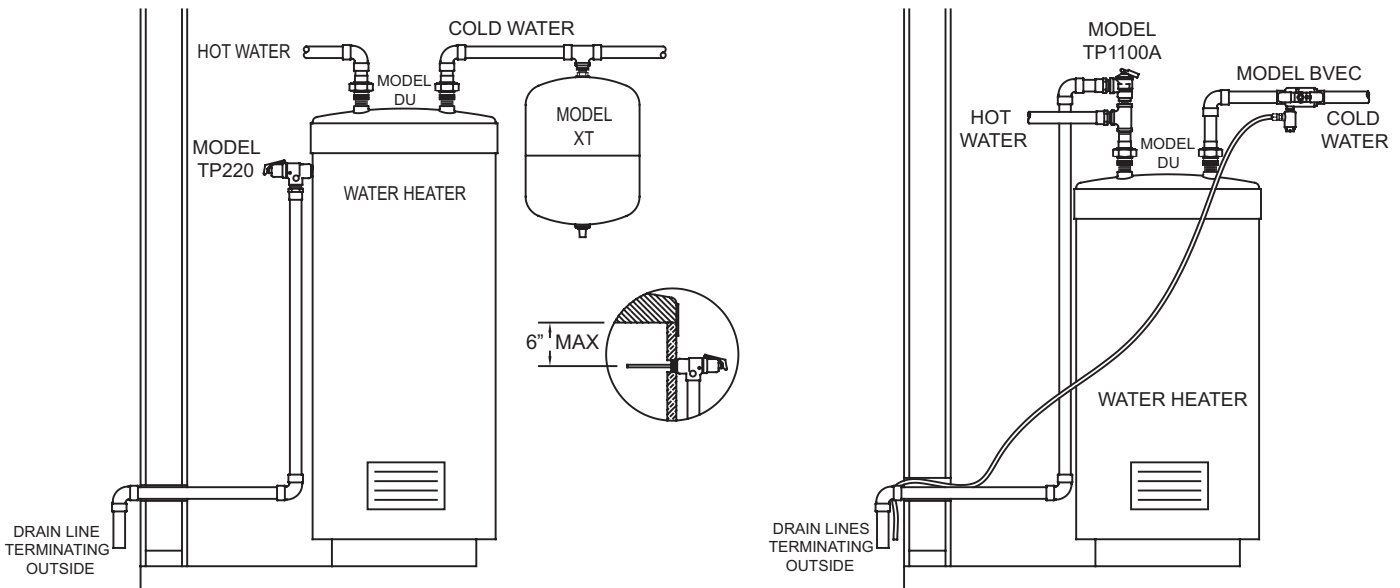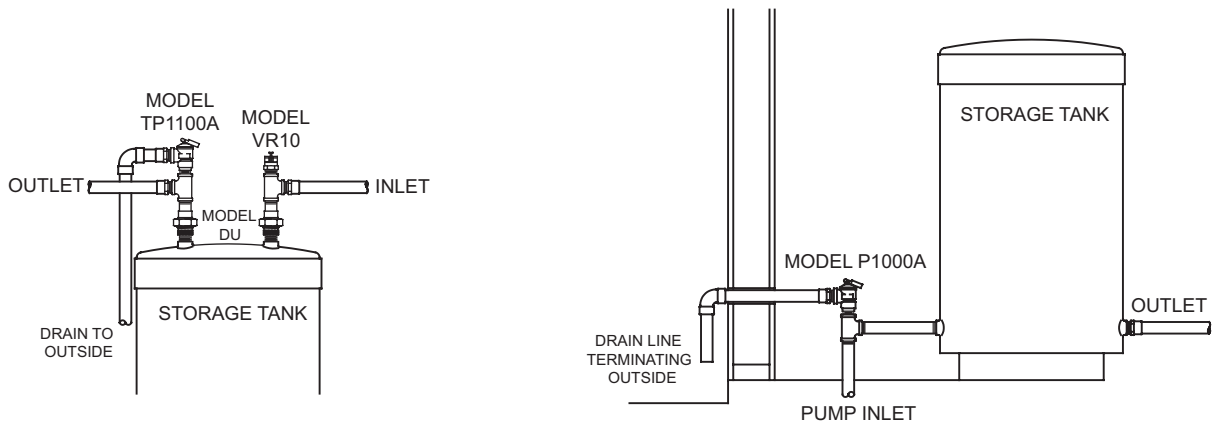


TYPICAL INSTALLATION

SPECIFICATIONS

The Relief Valve shall meet the requirements of the ASME Boiler and Pressure Vessel Code (Section IV) and shall be CSA Design Certified (ANSI Z21.22/CSA 4.4). Where pressure only relief is required, the assembly shall be a WILKINS Model P1000A. Where temperature and pressure relief is required, the assembly shall be a WILKINS Model TP1100A, TP220 or TP3000.

SPECIFICATION SUBMITTAL SHEET

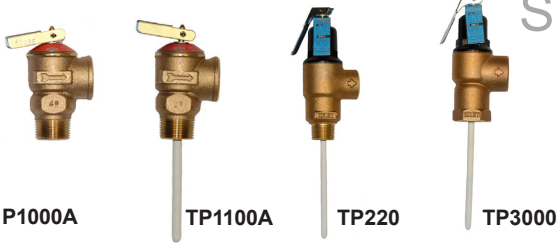

FEATURES

(T&P valve)

Probe sizes: 2" 3" 4" 5" 8"

OPTIONS

E - Model TP1100AE extended body

ACCESSORIES

- Expansion tank (Model XT or WXTP)
- Water pressure reducing valve (Model NR3XL)
- Vacuum Relief Valve (Model VR10)
- Expansion control ball valve (Model BVEC)

APPLICATION

Designed for installation on potable water heating storage vessels to protect against over-temperature or excessive pressure. (Not for steam service)


STANDARDS COMPLIANCE

(See below for applicable models and pressure settings)


- CSA Compliance to ANSI Z21.22/CSA 4.4
- Certified to ASME Section IV by National Board

MATERIALS


Main valve body Cast Brass or Bronze, ASTM B 584
 Internals Stainless Steel, 300 Series
 Brass, ASTM B 36 and B 16
 EP, Silicone
 Springs Stainless Steel, ASTM A 313
 Probes Epoxy Coated copper tube, FDA approved




P1000A



TP1100A



TP220



TP3000



DIMENSIONS & WEIGHTS (do not include pkg.)

MODEL NUMBER	DISCHARGE RATES				RELIEF TEMP F	DIMENSIONS											
	PRESS. RELIEF SETTING PSI	ANSI Z21.22/ CSA 4.4 BTU/HR	ASME SECTION IV BTU/HR	F		INLET	OUTLET	A		B		C		D		E	
								in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
P1000A-30C	30	-	500,000	N/A	3/4 MNPT	3/4 FNPT	1-1/4	32	1-5/8	41	1-13/16	46	n/a	-	1-3/16	30	
P1000A-75C	75	-	300,000	N/A	3/4 MNPT	3/4 FNPT	1-1/4	32	1-5/8	41	1-13/16	46	n/a	-	1-3/16	30	
P1000A-125C	125	200,000	500,000	N/A	3/4 MNPT	3/4 FNPT	1-1/4	32	1-5/8	41	1-13/16	46	n/a	-	1-3/16	30	
P1000A-150C	150	200,000	500,000	N/A	3/4 MNPT	3/4 FNPT	1-1/4	32	1-5/8	41	1-13/16	46	n/a	-	1-3/16	30	
TP1100A-2C-150C	150	95,000	500,000	210	3/4 MNPT	3/4 FNPT	1-1/4	32	1-5/8	41	3-3/16	81	1-5/16	33	1-3/16	30	
TP1100A-4C-75C	75	105,000	300,000	210	3/4 MNPT	3/4 FNPT	1-1/4	32	1-5/8	41	4-7/8	124	3-3/32	79	1-3/16	30	
TP1100A-4C-125C	125	105,000	500,000	210	3/4 MNPT	3/4 FNPT	1-1/4	32	1-5/8	41	4-7/8	124	3-3/32	79	1-3/16	30	
TP1100A-4C-150C	150	105,000	500,000	210	3/4 MNPT	3/4 FNPT	1-1/4	32	1-5/8	41	4-7/8	124	3-3/32	79	1-3/16	30	
TP1100A-4C-175C	175	95,000	-	210	3/4 MNPT	3/4 FNPT	1-1/4	32	1-5/8	41	4-7/8	124	3-3/32	79	1-3/16	30	
TP1100A-8C-150C	150	105,000	500,000	210	3/4 MNPT	3/4 FNPT	1-1/4	32	1-5/8	41	9-3/4	248	7-7/8	200	1-3/16	30	
TP1100AE-3C-150C	150	105,000	500,000	210	3/4 MNPT	3/4 FNPT	1-1/4	32	1-5/8	41	4-7/8	124	2-1/8	54	2-3/32	53	
TP220-5C-125C	125	205,000	1,619,000	210	3/4 MNPT	3/4 FNPT	1-1/2	38	3-15/32	88	6-7/8	175	4-7/16	113	1-3/4	45	
TP220-5C-150C	150	205,000	1,912,000	210	3/4 MNPT	3/4 FNPT	1-1/2	38	3-15/32	88	6-7/8	175	4-7/16	113	1-3/4	45	
TP220-8C-150C	150	205,000	1,912,000	210	3/4 MNPT	3/4 FNPT	1-1/2	38	3-15/32	88	10-1/8	257	7-11/16	196	1-3/4	45	
TP3000-5C-75C	75	500,000	1,165,000	210	1 FNPT	1 FNPT	1-9/16	40	3-1/2	89	6-7/8	175	4-3/4	121	1-5/16	34	
TP3000-5C-100C	100	500,000	1,495,000	210	1 FNPT	1 FNPT	1-9/16	40	3-1/2	89	6-7/8	175	4-3/4	121	1-5/16	34	
TP3000-5C-125C	125	500,000	1,825,000	210	1 FNPT	1 FNPT	1-9/16	40	3-1/2	89	6-7/8	175	4-3/4	121	1-5/16	34	
TP3000-5C-150C	150	500,000	2,155,000	210	1 FNPT	1 FNPT	1-9/16	40	3-1/2	89	6-7/8	175	4-3/4	121	1-5/16	34	
TP3000-8C-125C	125	750,000	3,070,000	210	1 FNPT	1 FNPT	1-3/4	44	4-3/8	111	9-1/4	235	8-5/32	207	5/16	8	
TP3000-8C-150C	150	750,000	3,625,000	210	1 FNPT	1 FNPT	1-3/4	44	4-3/8	111	9-1/4	235	8-5/32	207	5/16	8	

DOCUMENT #: TP-TP&P-C REVISION: 8/12

TYPICAL INSTALLATION

Local codes shall govern installation requirements. Unless otherwise specified, the relief valve shall be installed in accordance with manufacturer's instructions and the latest edition of the Uniform Plumbing Code ®.

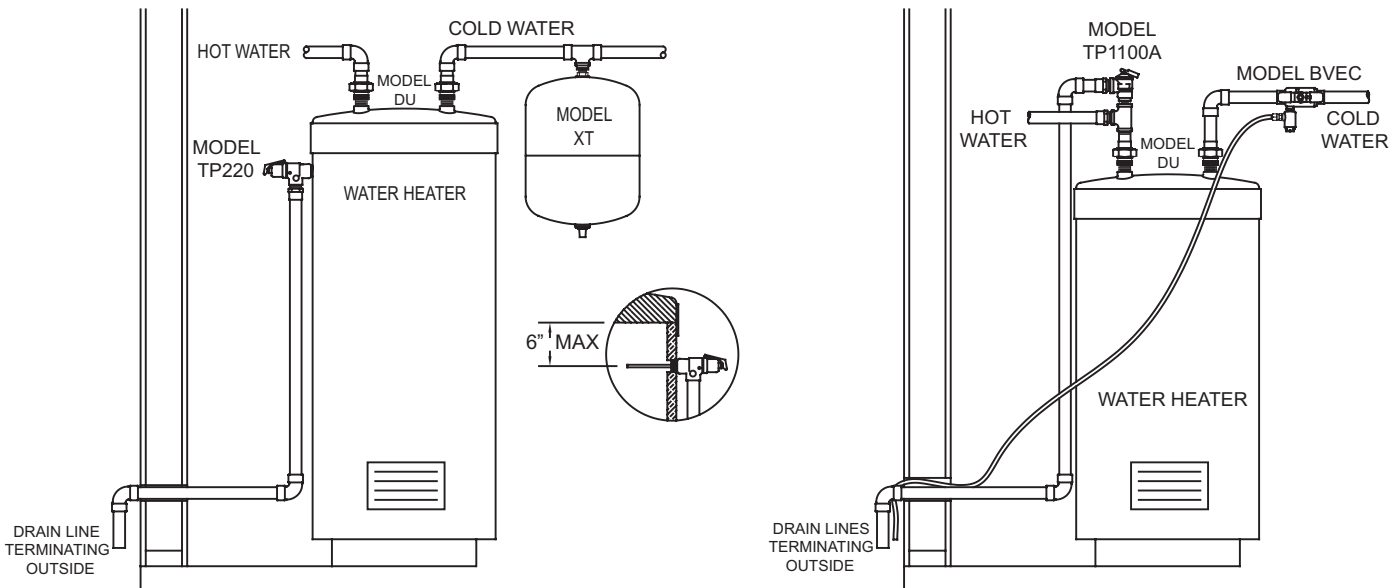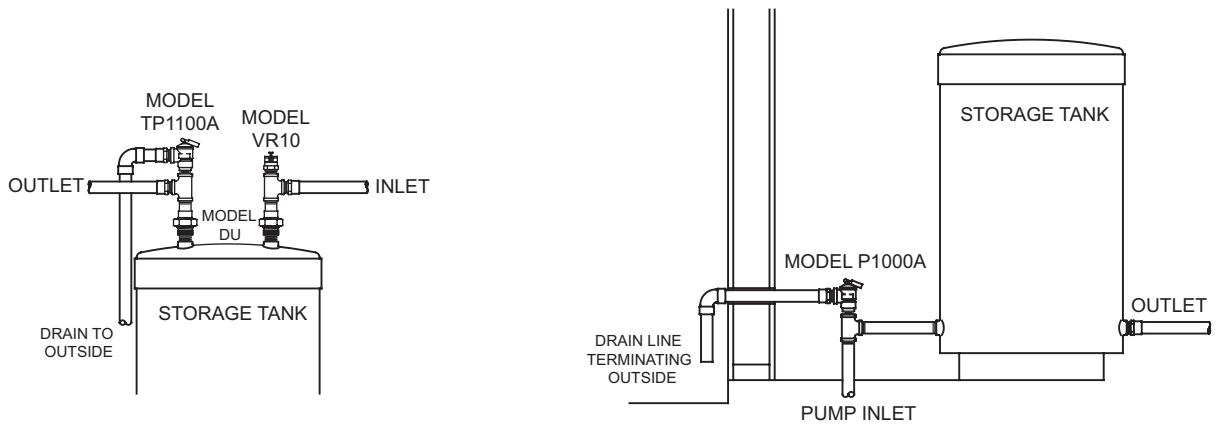

TYPICAL INSTALLATION

SPECIFICATIONS

The Relief Valve shall meet the requirements of the ASME Boiler and Pressure Vessel Code (Section IV) and shall be CSA Design Certified (ANSI Z21.22/CSA 4.4). Where pressure only relief is required, the assembly shall be a WILKINS Model P1000A. Where temperature and pressure relief is required, the assembly shall be a WILKINS Model TP1100A, TP220 or TP3000.