


## COMPACT FLUORESCENT LAMPS

The overall length of DULUX® compact fluorescent lamps is measured from the bottom of the base to the outside edge of the glass. In many cases, the bottom of the base is the bottom of the center post of the base of the lamp.

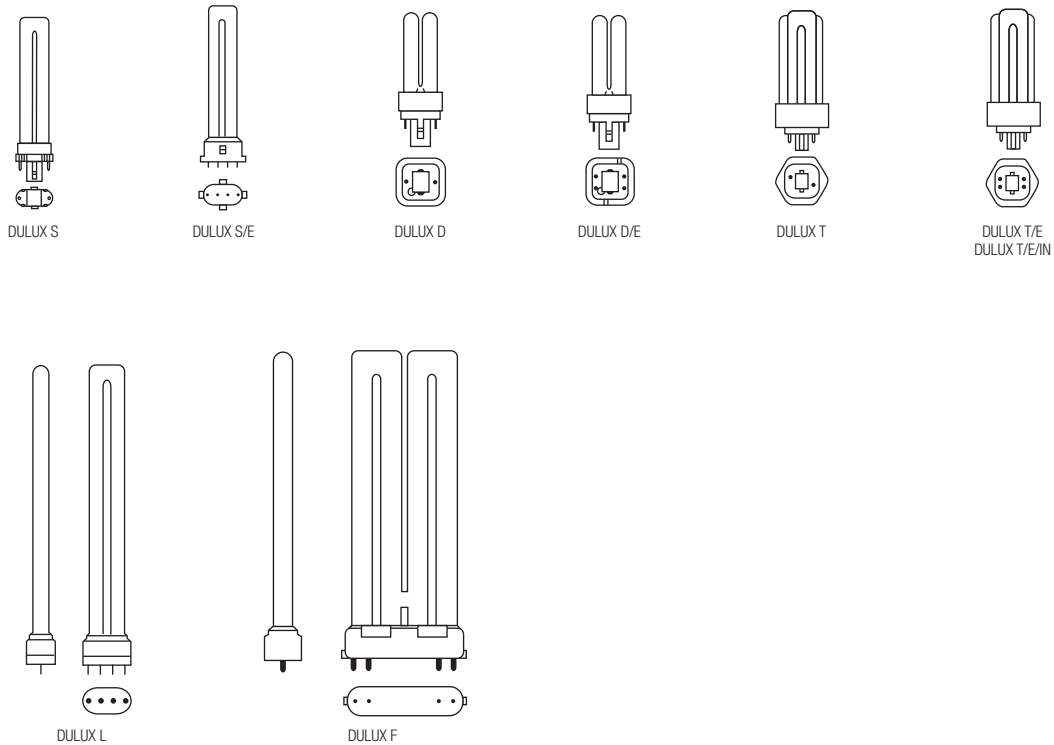


## BASES


Pin-based compact fluorescent lamps have either 2 pins or 4 pins. Each 2-pin lamp has an internal starter and is designed for preheat, magnetic operation. The 4-pin lamps are designed for electronic ballast operation and are dimmable. These lamps have no internal starter; starting the lamps is a function of the ballast.

Medium screw base, compact fluorescent lamps have integral ballasts.

FOR CHOKE/STARTER OPERATION

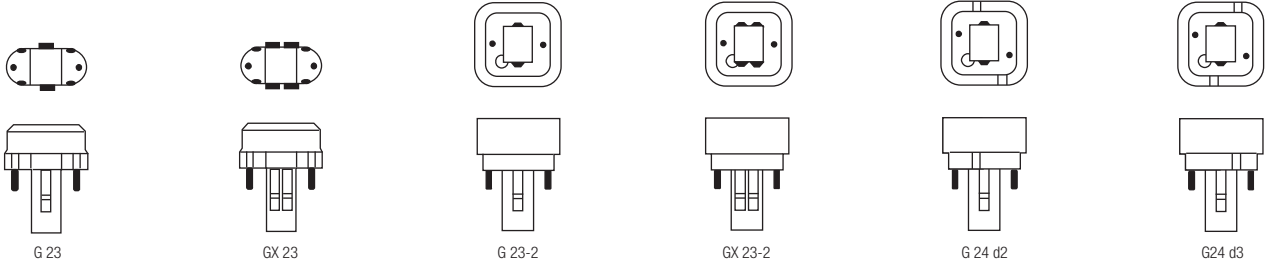

FOR ELECTRONIC OR DIMMING OPERATION

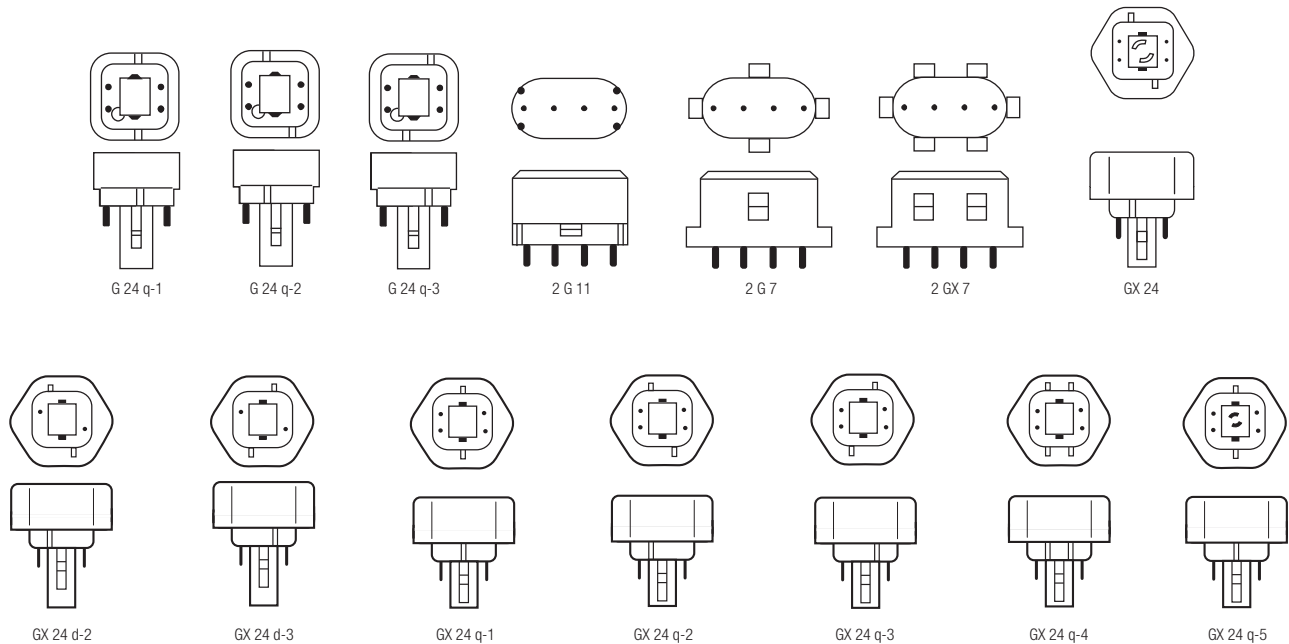

## LAMP DISPOSAL LABELING

The following information appears on the packages of fluorescent lamps.



For weight and measurement information, please visit [www.sylvania.com](http://www.sylvania.com)

## DULUX® L ECOLOGIC® Compact Fluorescent Lamps

| Nominal Wattage | Bulb Shape | MOL (in) | MOL (mm) | Base | Product Number | Ordering Abbreviation | Pkg Qty | Average Rated Life (hrs) | CCT (K) | CRI | Approx. Lumens Initial (Mean) at 25°C/77°F | Notes                                                                                              |
|-----------------|------------|----------|----------|------|----------------|-----------------------|---------|--------------------------|---------|-----|--------------------------------------------|----------------------------------------------------------------------------------------------------|
| 18              | L (T5)     | 9        | 225      | 2G11 | 20587          | FT18DL/835/ECO        | 10      | 12000                    | 3000    | 82  | 1250 (1075)                                | <br>1,2,4,5,9   |
|                 |            |          |          |      | 20588          | FT18DL/835/ECO        | 10      | 12000                    | 3500    | 82  | 1250 (1075)                                | <br>1,2,4,5,9   |
|                 |            |          |          |      | 20589          | FT18DL/841/ECO        | 10      | 12000                    | 4100    | 82  | 1250 (1075)                                | <br>1,2,4,5,9   |
| 18              | L (T5)     | 10.5     | 268      | 2G11 | 20595          | FT18DL/830/RS/ECO     | 10      | 20000                    | 3000    | 82  | 1120 (963)                                 | <br>1,2,4,5,9   |
|                 |            |          |          |      | 20594          | FT18DL/835/RS/ECO     | 10      | 20000                    | 3500    | 82  | 1250 (1075)                                | <br>1,2,4,5,9   |
|                 |            |          |          |      | 20593          | FT18DL/841/RS/ECO     | 10      | 20000                    | 4100    | 82  | 1250 (1075)                                | <br>1,2,4,5,9   |
| 24              | L (T5)     | 12.9     | 320      | 2G11 | 20597          | FT24DL/830/ECO        | 10      | 12000                    | 3000    | 82  | 1800 (1548)                                | <br>1,2,4,5,9   |
|                 |            |          |          |      | 20580          | FT24DL/835/ECO        | 10      | 12000                    | 3500    | 82  | 1800 (1548)                                | <br>1,2,4,5,9   |
|                 |            |          |          |      | 20596          | FT24DL/841/ECO        | 10      | 12000                    | 4100    | 82  | 1800 (1548)                                | <br>1,2,4,5,9   |
| 36              | L (T5)     | 16.6     | 415      | 2G11 | 20581          | FT36DL/830/ECO        | 10      | 12000                    | 3000    | 82  | 2900 (2495)                                | <br>1,2,4,5,9  |
|                 |            |          |          |      | 20582          | FT36DL/835/ECO        | 10      | 12000                    | 3500    | 82  | 2901 (2495)                                | <br>1,2,4,5,9 |
|                 |            |          |          |      | 20583          | FT36DL/841/ECO        | 10      | 12000                    | 4100    | 82  | 2902 (2495)                                | <br>1,2,4,5,9 |
| 40              | L (T5)     | 22.4     | 570      | 2G11 | 20584          | FT40DL/830/RS/ECO     | 10      | 15000                    | 3000    | 82  | 3150 (2710)                                | <br>1,2,4,5,9 |
|                 |            |          |          |      | 20585          | FT40DL/835/RS/ECO     | 10      | 15000                    | 3500    | 82  | 3150 (2710)                                | <br>1,2,4,5,9 |
|                 |            |          |          |      | 20586          | FT40DL/841/RS/ECO     | 10      | 15000                    | 4100    | 82  | 3150 (2710)                                | <br>1,2,4,5,9 |
|                 |            |          |          |      | 20576          | FT40DL/850/RS/ECO     | 10      | 20000                    | 5000    | 82  | 3150 (2710)                                | <br>1,2,4,5,9 |
| 50              | L (T5)     | 22.6     | 570      | 2G11 | 20278          | FT50DL/835/RS/ECO     | 10      | 14000                    | 3500    | 82  | 4300 (3655)                                | <br>1,2,4,5,9 |
|                 |            |          |          |      | 20276          | FT50DL/841/RS/ECO     | 10      | 14000                    | 4100    | 82  | 4300 (3655)                                | <br>1,2,4,5,9 |
| 55              | L (T5)     | 21.1     | 535      | 2G11 | 20590          | FT55DL/830/ECO        | 10      | 12000                    | 3000    | 82  | 4800 (4143)                                | <br>1,2,4,5,9 |
|                 |            |          |          |      | 20591          | FT55DL/835/ECO        | 10      | 12000                    | 3500    | 82  | 4800 (4143)                                | <br>1,2,4,5,9 |
|                 |            |          |          |      | 20592          | FT55DL/841/ECO        | 10      | 12000                    | 4100    | 82  | 4800 (4143)                                | <br>1,2,4,5,9 |
|                 |            |          |          |      | 20725          | FT55DL/954/ECO        | 10      | 20000                    | 5400    | 82  | 4000 (4128)                                | <br>1,2,4,5,9 |