




American Standard

NextGen™ & Paradigm™ Selectronic® Integrated Faucet Battery Powered

- ***CR-P2 lithium battery** preinstalled in the faucet
- ***SmarTherm™ Safety Shut-Off:** Integral thermostatic hot water temperature limiter meets ASSE 1070 without a separate thermostatic mixing valve
- ***Above-Deck Mixing:** Allows user to manually adjust temperature.
- ***Dual Inlets:** For hot and cold water. Check valves included to prevent cross flow. Filter assemblies protect the solenoid valve from debris.
- ***Hygienic, touch-free sensor operation**
- ***Simple, Integral Design:** All electronics contained in faucet spout. No control box below.
- ***Easy Installation & Maintenance:** Faucet installs from the top. All serviceable parts are easily accessible.
- ***Laminar Flow/Spay** provides a solid stream of water with NO air
- **Self-Cleaning Solenoid Reduces Maintenance:** Integral wiper spring prevents clogging and run-on. Silicon seals.
- **Adjustable Range:** Detection zone can be adjusted manually or with optional ***remote control**.
- ***Optional Remote Control Allows for Customization**
 - **Auto Purge:** Periodically purges stagnant water from faucet and supply lines. Frequency and duration are adjustable.
 - **Safety Timer:** Turns water off if the sensor is blocked for 55 seconds. Timing is adjustable.
- ***Deck Plates:** Available 4" and 8" plates

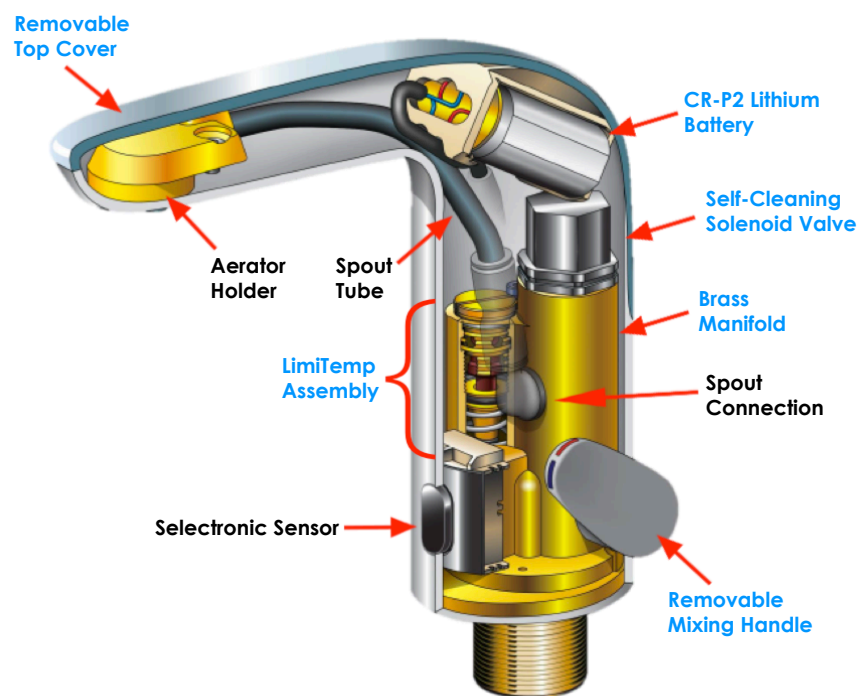

SmarTherm +ADM



ADA Compliant



Water Efficient



LeadFree



WaterSense



LeadFree

- [Click To Learn More About NextGen™ Selectronic® Faucet](#)
- [Click To View Installation Video](#)
- [Click To View Environment Product Declaration](#)
- [Click To View NextGen SmarTherm Specification Sheet](#)
- [Click To View Paradigm SmarTherm Specification Sheet](#)

*Click on words in blue for additional details.

American Standard

PART OF LIXIL

©2020 AS America, Inc.
americanstandard-us.com

Less Mixing: Single Inlet for Cold or Tempered Water



0.35 gpm pressure-compensating, vandal-resistant multi-laminar spray
7755.103.002



0.5 gpm pressure-compensating, vandal-resistant multi-laminar spray
7755.105.002



1.5 gpm pressure-compensating, vandal-resistant laminar flow outlet with adjustable spray face
7755.115.002

Above Deck Mixing (ADM): Dual Inlets for Hot and Cold Water



0.35 gpm pressure-compensating, vandal-resistant multi-laminar spray
7755.203.002



0.5 gpm pressure-compensating, vandal-resistant multi-laminar spray
7755.205.002



1.5 gpm pressure-compensating, vandal-resistant laminar flow outlet with adjustable spray face
7755.215.002

SmarTherm + ADM: Dual Inlets for Hot and Cold Water



0.35 gpm pressure-compensating, vandal-resistant multi-laminar spray
7755.303.002



0.5 gpm pressure-compensating, vandal-resistant multi-laminar spray
7755.305.002



1.5 gpm pressure-compensating, vandal-resistant laminar flow outlet with adjustable spray face
7755.315.002



4" Deck Plate
775P.400.002



8" Deck Plate
775P.800.002



SmarTherm



ADA Compliant



Water Efficient



California Energy Commission



WaterSense



LeadFree

American Standard

FIAT PRODUCTS

PART OF LIXIL

©2020 AS America, Inc.
americanstandard-us.com

Less Mixing: Single Inlet for Cold or Tempered Water



0.35 gpm pressure-compensating, vandal-resistant multi-laminar spray
7025.103.002



0.5 gpm pressure-compensating, vandal-resistant multi-laminar spray
7025.105.002



1.5 gpm pressure-compensating, vandal-resistant laminar flow outlet with adjustable spray face
7025.115.002

Above Deck Mixing (ADM): Dual Inlets for Hot and Cold Water



0.35 gpm pressure-compensating, vandal-resistant multi-laminar spray
7025.203.002



0.5 gpm pressure-compensating, vandal-resistant multi-laminar spray
7025.205.002



1.5 gpm pressure-compensating, vandal-resistant laminar flow outlet with adjustable spray face
7025.215.002

SmarTherm + ADM: Dual Inlets for Hot and Cold Water



0.35 gpm pressure-compensating, vandal-resistant multi-laminar spray
7025.303.002



0.5 gpm pressure-compensating, vandal-resistant multi-laminar spray
7025.305.002



1.5 gpm pressure-compensating, vandal-resistant laminar flow outlet with adjustable spray face
7025.315.002



4" Deck Plate
702P.400.002



8" Deck Plate
775P.800.002



SmarTherm



ADA Compliant



Water Efficient



California Energy Commission



WaterSense



LeadFree

American Standard

FIAT PRODUCTS

PART OF LIXIL

©2020 AS America, Inc.
americanstandard-us.com