

COMPACT FLUORESCENT LAMPS


The overall length of DULUX® compact fluorescent lamps is measured from the bottom of the base to the outside edge of the glass. In many cases, the bottom of the base is the bottom of the center post of the base of the lamp.




DULUX S



DULUX S/E




DULUX D




DULUX D/E




DULUX T



DULUX T/E
DULUX T/E/IN



DULUX L

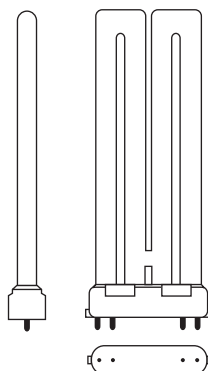


DULUX F

BASES


Pin-based compact fluorescent lamps have either 2 pins or 4 pins. Each 2-pin lamp has an internal starter and is designed for preheat, magnetic operation. The 4-pin lamps are designed for electronic ballast operation and are dimmable. These lamps have no internal starter; starting the lamps is a function of the ballast.

Medium screw base, compact fluorescent lamps have integral ballasts.

FOR CHOKE/STARTER OPERATION

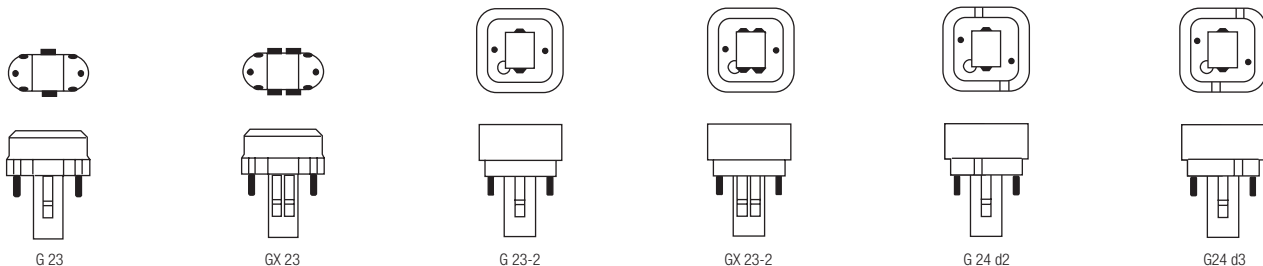

FOR ELECTRONIC OR DIMMING OPERATION


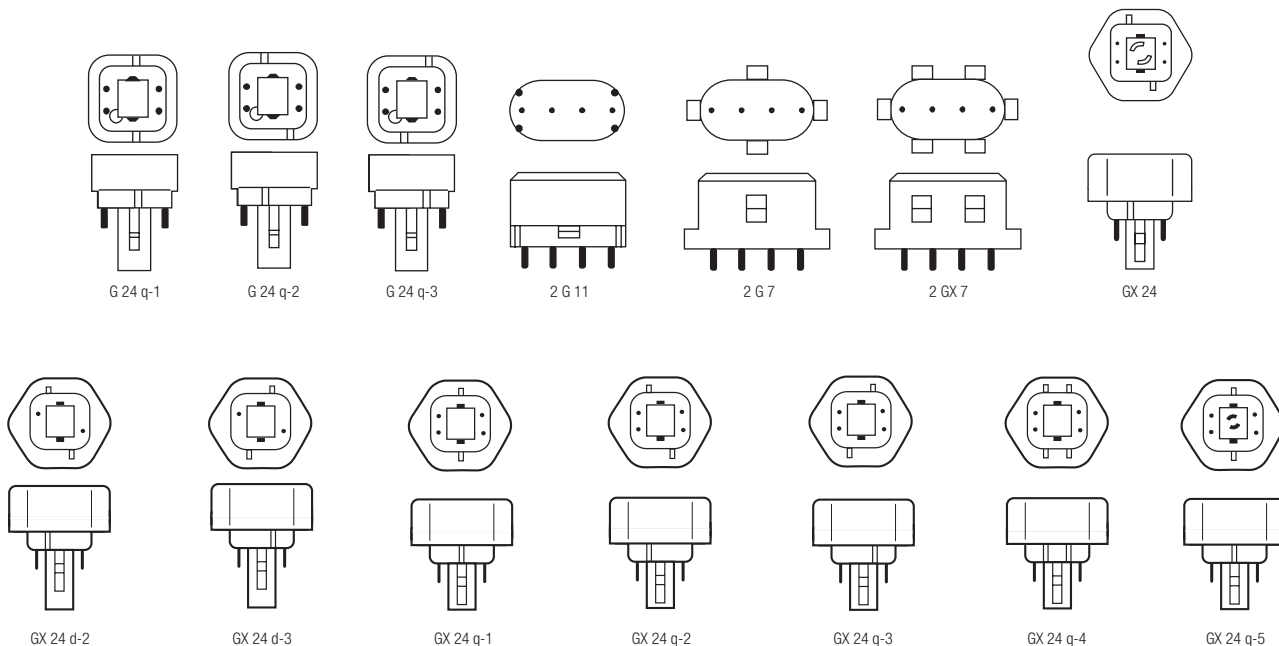


LAMP DISPOSAL LABELING

The following information appears on the packages of fluorescent lamps.



For weight and measurement information, please visit www.sylvania.com



DULUX® D/E 4-Pin ECOLOGIC® Double-Tube Compact Fluorescent Lamps – For Dimming and Electronic Ballast

Nominal Wattage	Bulb Shape	MOL (in)	MOL (mm)	Base	Product Number	Ordering Abbreviation	Pkg Qty	Average Rated Life (hrs)	CCT (K)	CRI	Approx. Lumens Initial (Mean) at 25°C/77°F	Notes
13	D (T4)	5.2	132	G24Q-1	20682	CF13DD/E/827/ECO	50	20000	2700	82	900 (775)	🔌🏠1,2,4,5,9
					20721	CF13DD/E/830/ECO	50	20000	3000	82	900 (775)	🔌🏠1,2,4,5,9
					20671	CF13DD/E/835/ECO	50	20000	3500	82	900 (775)	🔌🏠1,2,4,5,9
					20667	CF13DD/E/841/ECO	50	20000	4100	82	900 (775)	🔌🏠1,2,4,5,9
18	D (T4)	5.8	147	G24Q-2	20683	CF18DD/E/827/ECO	50	20000	2700	82	1150 (990)	🔌🏠1,2,4,5,9
					20724	CF18DD/E/830/ECO	50	20000	3000	82	1150 (990)	🔌🏠1,2,4,5,9
					20672	CF18DD/E/835/ECO	50	20000	3500	82	1150 (990)	🔌🏠1,2,4,5,9
					20668	CF18DD/E/841/ECO	50	20000	4100	82	1150 (990)	🔌🏠1,2,4,5,9
26	D (T4)	6.5	168	G24Q-3	20684	CF26DD/E/827/ECO	50	20000	2700	82	1710 (1470)	🔌🏠1,2,4,5,9
					20722	CF26DD/E/830/ECO	50	20000	3000	82	1710 (1470)	🔌🏠1,2,4,5,9
					20673	CF26DD/E/835/ECO	50	20000	3500	82	1710 (1470)	🔌🏠1,2,4,5,9
					20669	CF26DD/E/841/ECO	50	20000	4100	82	1710 (1470)	🔌🏠1,2,4,5,9

DULUX D Preheat 2-Pin ECOLOGIC Double-Tube Compact Fluorescent Lamps – With Starter in Base for Magnetic Ballasts

Nominal Wattage	Bulb Shape	MOL (in)	MOL (mm)	Base	Product Number	Ordering Abbreviation	Pkg Qty	Average Rated Life (hrs)	CCT (K)	CRI	Approx. Lumens Initial (Mean) at 25°C/77°F	Notes
9	D (T4)	4.33	110	G23-2	21122	CF9DD/827/ECO	50	10000	2700	82	525 (450)	🔌🏠1,3,5,9,11
					21123	CF9DD/835/ECO	50	10000	3500	82	525 (450)	🔌🏠1,3,5,9,11
13	D (T4)	4.65	118	GX23-2	21117	CF13DD/827/ECO	50	10000	2700	82	780 (670)	🔌🏠1,3,5,9,11
					21119	CF13DD/830/ECO	50	10000	3000	82	780 (670)	🔌🏠1,3,5,9,11
					21118	CF13DD/835/ECO	50	10000	3500	82	780 (670)	🔌🏠1,3,5,9,11
					21120	CF13DD/841/ECO	50	10000	4100	82	780 (670)	🔌🏠1,3,5,9,11
18	D (T4)	6.02	153	G24D-2	21109	CF18DD/827/ECO	50	10000	2700	82	1150 (1075)	🔌🏠1,3,5,9,11
					21112	CF18DD/830/ECO	50	10000	3000	82	1150 (1075)	🔌🏠1,3,5,9,11
					21110	CF18DD/835/ECO	50	10000	3500	82	1150 (1075)	🔌🏠1,3,5,9,11
					21111	CF18DD/841/ECO	50	10000	4100	82	1150 (1075)	🔌🏠1,3,5,9,11
26	D (T4)	6.81	168	G24D-3	21113	CF26DD/827/ECO	50	10000	2700	82	1710 (1550)	🔌🏠1,3,5,9,11
					21116	CF26DD/830/ECO	50	10000	3000	82	1710 (1550)	🔌🏠1,3,5,9,11
					21114	CF26DD/835/ECO	50	10000	3500	82	1710 (1550)	🔌🏠1,3,5,9,11
					21115	CF26DD/841/ECO	50	10000	4100	82	1710 (1550)	🔌🏠1,3,5,9,11

DULUX T/E XL 4-Pin EXTENDED Life ECOLOGIC Triple-Tube Compact Fluorescent Lamps – For Dimming and Electronic Ballast

Nominal Wattage	Bulb Shape	MOL (in)	MOL (mm)	Base	Product Number	Ordering Abbreviation	Pkg Qty	Average Rated Life @3hrs/start (hrs)	Average Rated Life @12hrs/start (hrs)	CCT (K)	CRI	Approx. Lumens Initial (Mean) at 25°C/77°F	Approx. Lumens Initial (Mean) at 30°C/86°F	Notes
26	T (T4)	5	126	GX24Q-3	21387	CF26DT/EIN/827/XL/ECO	50	26000	30000	2700	82	1750 (1500)	1800 (1550)	🔌🏠1,2,4,5,9,10
					21388	CF26DT/EIN/830/XL/ECO	50	26000	30000	3000	82	1750 (1500)	1800 (1550)	🔌🏠1,2,4,5,9,10
					21389	CF26DT/EIN/835/XL/ECO	50	26000	30000	3500	82	1750 (1500)	1800 (1550)	🔌🏠1,2,4,5,9,10
					21390	CF26DT/EIN/841/XL/ECO	50	26000	30000	4100	82	1750 (1500)	1800 (1550)	🔌🏠1,2,4,5,9,10
32	T (T4)	5.6	142	GX24Q-3	21391	CF32DT/EIN/827/XL/ECO	50	26000	30000	2700	82	2330 (2000)	2400 (2065)	🔌🏠1,2,4,5,9,10
					21392	CF32DT/EIN/830/XL/ECO	50	26000	30000	3000	82	2330 (2000)	2400 (2065)	🔌🏠1,2,4,5,9,10
					21393	CF32D/TEIN/835/XL/ECO	50	26000	30000	3500	82	2330 (2000)	2400 (2065)	🔌🏠1,2,4,5,9,10
					21394	CF32DT/EIN/841/XL/ECO	50	26000	30000	4100	82	2330 (2000)	2400 (2065)	🔌🏠1,2,4,5,9,10
42	T (T4)	6.5	163	GX24Q-4	21395	CF42DT/EIN/827/XL/ECO	50	26000	30000	2700	82	3100 (2670)	3200 (2750)	🔌🏠1,2,4,5,9,10
					21396	CF42DT/EIN/830/XL/ECO	50	26000	30000	3000	82	3100 (2670)	3200 (2750)	🔌🏠1,2,4,5,9,10
					21397	CF42DT/EIN/835/XL/ECO	50	26000	30000	3500	82	3100 (2670)	3200 (2750)	🔌🏠1,2,4,5,9,10
					21398	CF42DT/EIN/841/XL/ECO	50	26000	30000	4100	82	3100 (2670)	3200 (2750)	🔌🏠1,2,4,5,9,10