



# Pulse Start Metal Halide Standard

Pulse Start MH Std 175W/635 Mog ED28 CL 1SL

Philips Pulse Start Metal Halide Lamps offer an optimized metal halide system for greater efficiency and lumen maintenance.

## Product data

### • General Characteristics

System Description	Pulse Start
Base	Mogul [Mogul]
Base Information	Nic/Brass [Nickel/Brass Base]
Bulb	ED28
Bulb Material	Hard Glass
Bulb Finish	Clear
Operating Position	Base Up +/-15D [Hanging +/-15D or Base Up (BU)]
Main Application	General Lighting
RatedAvgLife(See Family Notes)	15000 hr

### • Light Technical Characteristics

Color Code	635 [CCT of 3500K]
Color Rendering Index	62 Ra8
Color Designation	White
Color Temperature	3700 K
Color Temperature technical	3800 K
Initial Lumens	16000 Lm
Luminous Efficacy Lamp	91 Lm/W
Design Mean Lumens	11200 Lm
Chromaticity Coordinate X	395 -
Chromaticity Coordinate Y	390 -

### • Electrical Characteristics

Watts	175 W
Lamp Voltage	132 V
Lamp Current	1.5 A
Ignition Time	120 (max) s

Re-ignition Time [min]	10 (max) min
------------------------	--------------

### • Environmental Characteristics

Mercury (Hg) Content	30.6 (max) mg
----------------------	---------------

### • UV-related Characteristics

Damage Factor D/fc PET (NIOSH)	0.48 - 54.8 h500lx
--------------------------------	--------------------

### • Luminaire Design Requirements

Cap-Base Temperature	210 (max) C
Bulb Temperature	400 (max) C

### • Product Dimensions

Light Center Length L	5 in
Max Overall Length (MOL) - C	8.313 (max) in
Diameter D	3.5 in

### • Product Data

Product number	276626
Full product name	Pulse Start MH Std 175W/635 Mog ED28 CL 1SL
Short product name	MS175/BU/PS 12PK
Pieces per Sku	1
eop_pck_cfg	12
Skus/Case	12
Bar code on pack	46677276621

# PHILIPS

# Pulse Start Metal Halide Standard

Bar code on case 50046677276626  
Logistics code(s) 928601152103



eop\_net\_weight\_pp 0.001 kg

## Warnings and Safety

- R "WARNING: These lamps can cause serious skin burn and eye inflammation from short wave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will

remain for more than a few minutes unless adequate shielding or other safety precautions are used. Certain lamps that will automatically extinguish when the outer envelope is broken or punctured are commercially available." This lamp complies with FDA radiation performance standard 21 CFR subchapter J. (USA:21 CFR 1040.30 Canada: SOR/DORS/80-381)

## Dimensional drawing

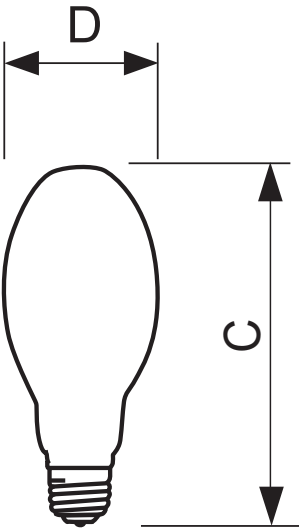

E39

## Pulse Start MH Std 175W/635 Mog ED28 CL 1SL

Product	C (Max)	D (Norm)
MH PS 175W/635 E39 ED28 BU	8.313	3.5



© 2015 Koninklijke Philips N.V. (Royal Philips)  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2015, July 27  
data subject to change