


22/6 PLENUM RATED, SHIELDED SECURITY & CONTROL CABLE



22 AWG 6 Stranded Conductors, Shielded

Ratings CMP, CL3P, FT6
Approvals ETL Listed

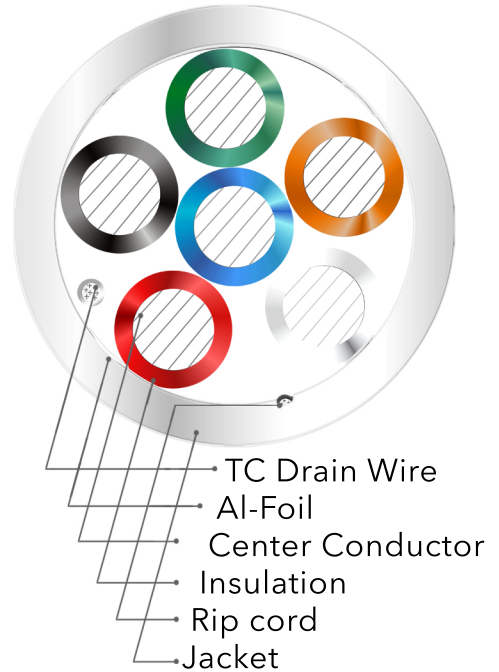

Construction

Conductor 22 AWG 7 Strand Bare Copper
Conductor Count 6
Insulation Plenum PVC (0.007" nom.)
Insulation Colors Black, Red, White, Green, Brown, Blue
Lay Length 2.53" nom.
Shielding Aluminum Foil/Mylar w/ 24 AWG Tinned-Copper Drain
Rip Cord Yes
Jacket Plenum PVC (0.015" nom.)
Overall Diameter 0.162" nom.

Print Legend ADI PRO P/N RN-91SPXXX OXYGEN
FREE 6C22 SHIELDED 3180662 C(ETL)US
CL3P 75C, CMP FT6 RoHS LOT#XXXX MMDDYY XXXXFT

Properties

Operating Voltage 300 Volts max.
DC Resistance 16.9 Ohms/1000' at 20°C
Capacitance 26.0 pF/ft. nom.
Temperature -20°C to 75°C
Flame Rating NFPA 262 (Plenum);
CSA C22.2 No. 2556 (FT6)
RoHS Compliant Yes
Country of Origin CHINA

PART#	COLOR	LENGTH	BOX
RN-91SP101	OFF WHITE	1000FT	EXPRESS BOX
RN-91SP510	OFF WHITE	500FT	EXPRESS BOX



For more information contact your ADI Sales person or visit adiglobal.com/adiexclusivebrands