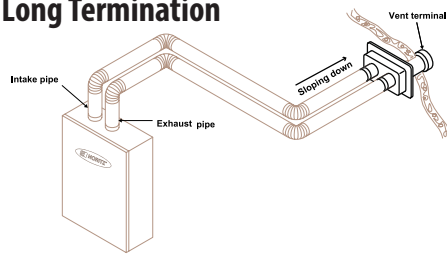


Stainless Steel Venting for SV and DV Models SV DV

N-Vent Direct Vent Long Termination

Specifications & Features

- Stainless Steel
- 4" Diameter
- Easy installation
- Professional appearance



Use a listed Category III vent adaptor to connect the flue collar to the vent system. Use Category III vent pipe for the entire length of the exhaust pipe.


Part Name	Type	Wall Thickness	Dimensions (inches)		Part Number	Qty/ Box
Vent Termination	Long		Sleeve**	Termination** (L2)		
		3.5"- 5.1"	3.5"- 5.0"	7.0"- 8.5"	VT4-TL-5	1
		5.1"- 8.3"	5.0"- 8.0"	8.5"- 12.0"	VT4-TL-8	1
		8.3"- 14.6"	8.0"- 15.0"	12.0"- 18.0"	VT4-TL-14	1
		14.6"- 27.2"	15.0"- 27.0"	18.0"- 30.5"	VT4-TL-27	1

**Sleeve and termination (L2) can be adjusted in increments of 0.4 inch

N-Vent Direct Vent Short Termination







Specifications & Features

- Stainless Steel
- 4" Diameter
- Easy installation
- Professional appearance



Part Name	Type	Wall Thickness	Dimensions (inches)		Part Number	Qty/ Box
Vent Termination	Long		Sleeve**	Termination** (L2)		
		3.5"- 5.1"	3.5"- 5.0"	7.0"- 8.5"	VT4-TS-5	1
		5.1"- 8.3"	5.0"- 8.0"	8.5"- 12.0"	VT4-TS-8	1
		8.3"- 14.6"	8.0"- 15.0"	12.0"- 18.0"	VT4-TS-14	1
		14.6"- 27.2"	15.0"- 27.0"	18.0"- 30.5"	VT4-TS-27	1

Components included in the Termination Kits are shown in bold and listed in the charts. Note: Additional venting components will be needed to complete most vent runs. **Sleeve and termination (L2) can be adjusted in increments of 0.4 inch

Part Name	Type	Description	Drawing	Size	Dimensions			Part Number	QTY/Box	
VENT PIPE	Rigid	6" Straight 12" Straight 24" Straight 36" Straight 48" Straight		3	3.0		12.0	14.0	VP3- 12STR	6
							24.0	26.0	VP3-24STR	6
							35.4	37.4	VP3-36STR	6
							48.0	50.0	VP3-48STR	6
				4	4.0		6.0	7.9	VP4- 6STR	6
							11.8	13.9	VP4- 12STR	6
							23.6	25.7	VP4-24STR	6
							35.5	37.5	VP4-36STR	6
							48.0	50.1	VP4-48STR	6
				5	5.0		6.0	8.6	VP5- 6STR	6
							11.8	14.5	VP5- 12STR	6
							23.6	26.3	VP5-24STR	6
							35.5	38.1	VP5-36STR	6
		48.0	50.7			VP5-48STR	6			
	Adjustable Vent Length	7"- 9.4" Adjustable 9"- 13.4" Adjustable 13"- 21.4" Adjustable 36"- 60" Adjustable		3	3.0	2.0		6.8"- 9.1"	VP3- 9.4ADJ	6
								9.5"- 14.6"	VP3- 13.4ADJ	6
								15.4"- 26.5"	VP3- 21.4ADJ	6
								36.0"- 60.0"	VP3-60.0ADJ	6
				4	4.0	2.1		6.8"- 9.1"	VP4- 9.4ADJ	6
								9.5"- 14.6"	VP4- 13.4ADJ	6
								15.4"- 26.5"	VP4- 21.4ADJ	6
								36.0"- 60.0"	VP4- 60.0ADJ	6
				5	5.0	2.7		6.8"- 9.1"	VP5- 9.4ADJ	6
								9.5"- 14.6"	VP5- 13.4ADJ	6
								15.4"- 26.5"	VP5-21.4ADJ	6
	Elbow	45 Degrees		3	3.0	2.0	3.6	VP3- 45ELB	6	
				4	4.0	2.1	4.0	VP4- 45ELB	6	
				5	5.0	2.7	5.4	VP5- 45ELB	6	
	Elbow	90 Degrees		3	3.0	2.0	5.2	VP3- 90ELB	6	
				4	4.0	2.1	6.2	VP4- 90ELB	6	
				5	5.0	2.7	7.9	VP5- 90ELB	6	
	Flexible	18" Flexible		4	4.0	17.7	19.8	VP4- 18FLEX	6	
				5	5.0	17.7	20.4	VP5-18FLEX	6	
	Adapter	Appliance Adapter			D	L1	L	D1		
				3	3.0	1.2	4.9	3.2	VP3-ADAPT-1	6
4				4.0	1.2	4.9	4.0	VP4-ADAPT-1	6	