



# T5 Preheat

## F8T5/CW PH 25PK

Philips T5 Fluorescent Lamps are incredibly powerful, environmentally responsible, long life lamps with an ultra-slim profile. This translates into reduced maintenance and disposal costs and also allows the use of smaller fixtures—which reduces ceiling clutter.


### Product data

| General Information                |                 |
|------------------------------------|-----------------|
| Cap-Base                           | G5              |
| Life to 50% Failures (Nom)         | 10,000 hour(s)  |
| Light Technical                    |                 |
| Color Code                         | 33-640          |
| Luminous Flux                      | 410 lm          |
| Color Designation                  | Cool White (CW) |
| Luminous Efficacy (rated) (Nom)    | 51 lm/W         |
| Correlated Color Temperature (Nom) | 4100 K          |
| Color rendering index (CRI)        | 60              |
| Operating and Electrical           |                 |
| Power Consumption                  | 7.1 W           |
| Lamp Current (Nom)                 | 0.145 A         |
| Voltage (Nom)                      | 56 V            |
| Controls and Dimming               |                 |
| Dimmable                           | Yes             |

| Mechanical and Housing          |                 |
|---------------------------------|-----------------|
| Bulb Shape                      | T5              |
| Approval and Application        |                 |
| Mercury (Hg) Content (Nom)      | 4.4 mg          |
| Energy Consumption kWh/1000 h   | 8 kWh           |
| Product Data                    |                 |
| Order product name              | F8T5/CW PH 25PK |
| Full product name               | F8T5/CW PH 25PK |
| Order code                      | 332478          |
| Material Nr. (12NC)             | 928001003321    |
| Numerator - Quantity Per Pack   | 1               |
| Net Weight (Piece)              | 27.000 g        |
| EAN/UPC - Product/Case          | 046677114640    |
| Numerator - Packs per outer box | 25              |
| EAN/UPC - Case                  | 50046677114645  |


T5 Preheat

Dimensional drawing



| Product         | D (max) | A (max)  | B (max)  | B (min)  | C (max)  |
|-----------------|---------|----------|----------|----------|----------|
| F8T5/CW PH 25PK | 16 mm   | 288.3 mm | 295.4 mm | 293.0 mm | 302.5 mm |

Photometric data

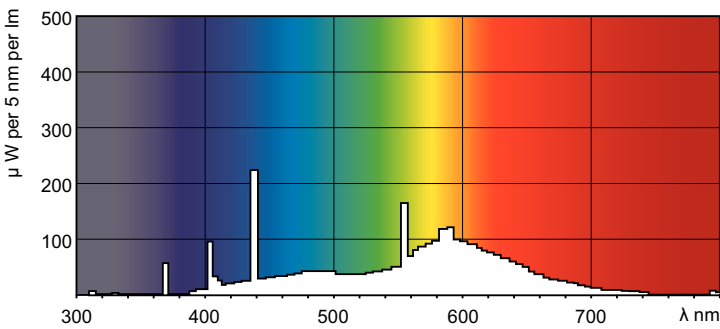

Spectral Power Distribution Colour - F8T5/CW PH 25PK

