

LEADED • THREAD ENDS

Features

- Full Port
- Bottom loaded stem - Blowout Proof
- Valves are all pressure tested
- PTFE Stem packing
- Plated steel handle

Specifications & Approvals

150 PSI


600 WOG

Conforms to MSS SP-110

IPS ends comply with ANSI/ASME B1.20.1

SWT ends comply with ANSI/ASME B16.18

UL/FM CSA UPC

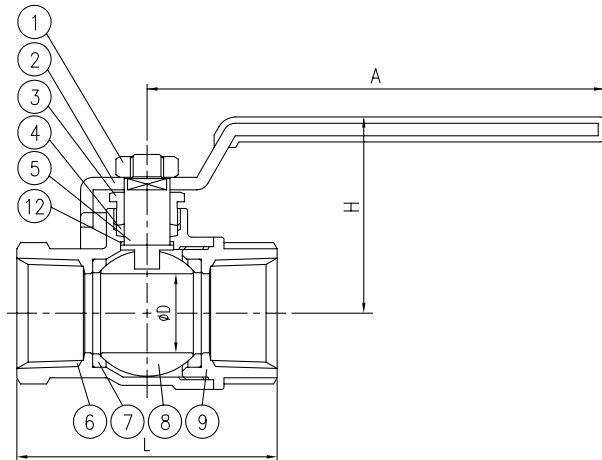

Dimensions

RAVEN
SPECIALTY PRODUCTS

Part #	Size	L	H	D	A
800T012-NL	1/2"	54	38	12.7	80
800T034-NL	3/4"	63	47	19	110
800T001-NL	1"	76	52	25	110
800T114-NL	1-1/4"	85	60	32	130
800T112-NL	1-1/2"	92	65	38	130
800T002-NL	2"	108	79	50	200
800T212-NL	2-1/2"	131	89	63	200
800T003-NL	3"	150	98	75	200
800T004-NL	4"	159	98	75	200

Material Specifications

Part Name	Material
1. Nut	AISI-1010 / JIS S10C
2. Handle	ASTM A283-D / JIS SS400
3. Stem Gland Screw	ASTM B16-C36000 / JIS H3250-C3604B
4. Stem Packing	PTFE
5. Stem	ASTM B16-C36000 / JIS H3250-C3604B
6. Body	C46400
7. Ball Disc Packing	PTFE
8. Ball Disc	C46400
9. End Plug	C46400
12. Thrust Washer	PTFE

LEADED • SWEAT ENDS

Features

- Full Port
- Bottom loaded stem - Blowout Proof
- Valves are all pressure tested
- PTFE Stem packing
- Plated steel handle

Specifications & Approvals

150 PSI


600 WOG

Conforms to MSS SP-110

IPS ends comply with ANSI/ASME B1.20.1

SWT ends comply with ANSI/ASME B16.18

UL/FM CSA UPC

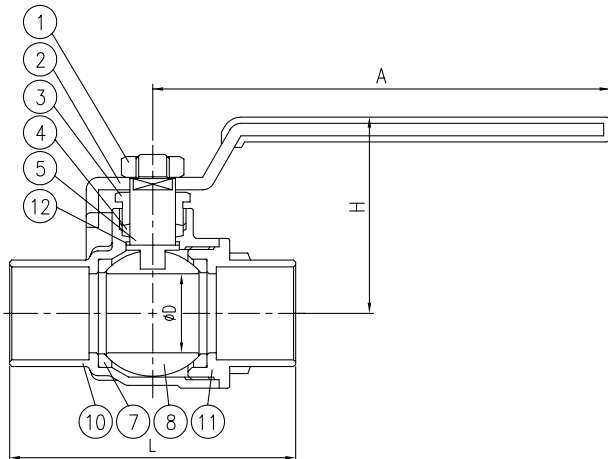

Dimensions

RAVEN
SPECIALTY PRODUCTS

Part #	Size	L	H	D	A
800C012-NL	1/2"	49	38	12.7	80
800C034-NL	3/4"	69	47	19	110
800C001-NL	1"	84	52	25	110
800C114-NL	1-1/4"	96	60	32	130
800C112-NL	1-1/2"	109	65	38	130
800C002-NL	2"	136	79	50	200
800C212-NL	2-1/2"	157	89	63	200
800C003-NL	3"	180	98	75	200
800C004-NL	4"	-	-	-	-

Material Specifications

Part Name	Material
1. Nut	AISI-1010 / JIS S10C
2. Handle	ASTM A283-D / JIS SS400
3. Stem Gland Screw	ASTM B16-C36000 / JIS H3250-C3604B
4. Stem Packing	PTFE
5. Stem	ASTM B16-C36000 / JIS H3250-C3604B
7. Ball Disc Packing	PTFE
8. Ball Disc	C46400
10. Body	C46400
11. End Plug	C46400
12. Thrust Washer	PTFE