


Sporlan HVACR components with the PZK designation have extended copper connections for use with ZoomLock® flame-free refrigerant fittings.

Labor and time saving solutions - helping your business win **MORE** business.

MEET  
**ZOOMLOCK®**  
**COMPATIBLE  
COMPONENTS**

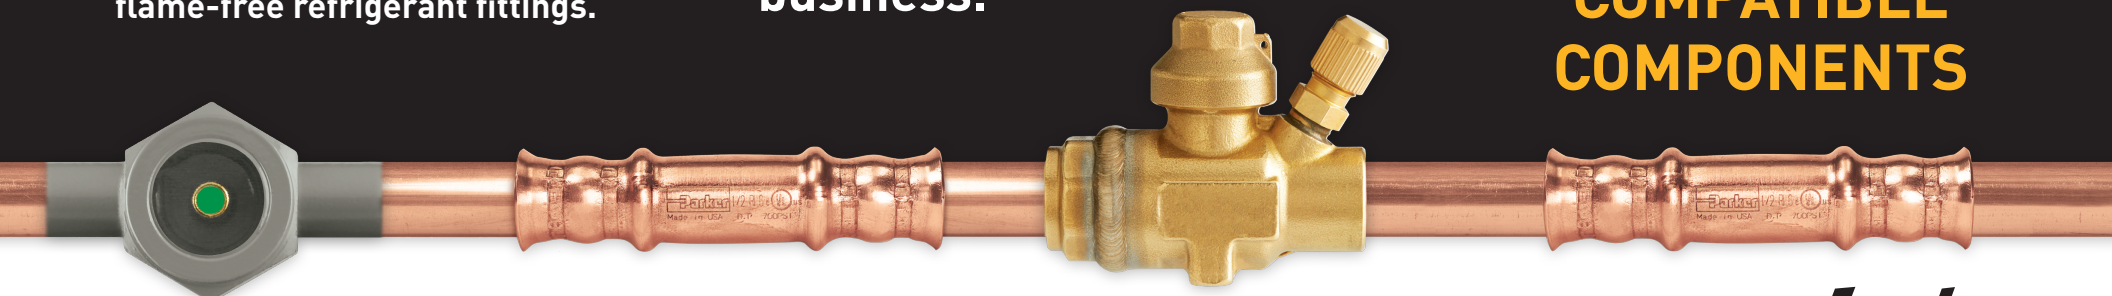


## See-All® Moisture Indicators

The Sporlan See-All Moisture & Liquid Indicator combines two functions of moisture and liquid indication into a single economical product.


### Features and Benefits:

- One indicator for all refrigerants.
- Reliable and accurately calibrated color change.
- Replaceable indicator element.

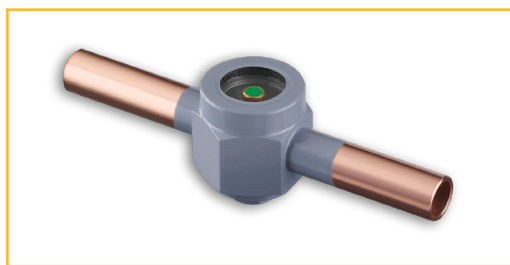

Description	Connection Size (ODM x ODM)	Part Number
SA-13-PZK	3/8"	761700
SA-14-PZK	1/2"	761701
SA-15-PZK	5/8"	761702
SA-17-PZK	7/8"	761703

- ▶ ODM X ODM connections for easy 10-second installation.
- ▶ 40-60% time and cost savings per job.
- ▶ No brazing. No flame. No fire watch required.
- ▶ Available where you find ZoomLock.

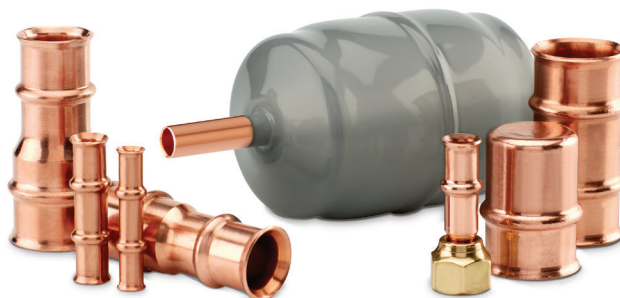

**ZoomLock®**

**SPORLAN HVACR COMPONENTS  
FOR ZOOMLOCK FLAME-FREE  
REFRIGERANT FITTINGS**



# Catch-All Filter-Driers

The Sporlan Catch-All® Liquid Line Sealed Model Filter-Drier Series provides unparalleled control of the most harmful contaminants in HVACR systems.

## Features and Benefits:

- Complete contaminant control to protect and extend system life and ensure system reliability.
- High performance desiccant package provides high water capacity & acid capacity.
- Porous molded core provides excellent filtration of solid debris for TEV and compressor protection.
- Models available with activated charcoal for use during system clean-up.




Description	Connection Size (ODM x ODM)	Part Number
C-083-PZK	3/8"	761000
C-163-PZK	3/8"	761200
C-164-PZK	1/2"	761201
C-165-PZK	5/8"	761202
C-167-PZK-T-HH	7/8"	761203
C-147-PZK-TT-HH	7/8"	761100
C-304-PZK	1/2"	761300
C-305-PZK	5/8"	761301
C-309-PZK-T-HH	1-1/8"	761302
C-417-PZK	7/8"	761400
HPC-103-PZK	3/8"	761500
HPC-104-PZK	1/2"	761501
HPC-163-PZK-HH	3/8"	761600
HPC-164-PZK-HH	1/2"	761601
HPC-165-PZK-HH	5/8"	761602

# Solenoids

The E series normally-closed type solenoid valves open when the coil is energized, and closes when the coil is de-energized. The valves are brass forged or brass bar stock.

## Features and Benefits:

- Class F coils.
- Disassembly for installation is unnecessary.
- Synthetic seating material for tight closing.
- Synthetic coated metal gaskets minimize external leaks.

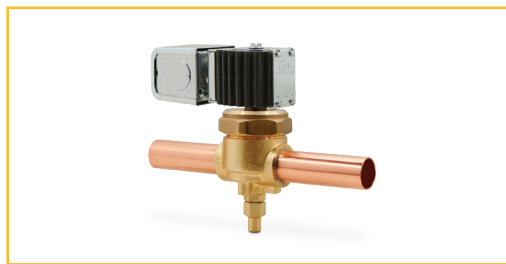


Description	Connection Size (ODM x ODM)	Part Number
E2S123-PZK-HP	1/4"	4603-00
E3S123-PZK	1/4"	4604-00
E3S133-PZK	3/8"	4605-00
E5S133-PZK-HP	3/8"	4606-00
E6S133-PZK-HP	3/8"	4607-00
ME6S133-PZK-HP	3/8"	4610-00
E8S143-PZK-HP	1/2"	4608-00
ME8S143PZK-HP	1/2"	4611-00
ME10S153-PZK-HP	5/8"	4612-00
ME14S253-PZK-HP	5/8"	4613-00
E19S273-PZK-HP	7/8"	4609-00
ME19S273-PZK	7/8"	4614-00
ME19S273-PZK-HP	7/8"	4615-00
ME25S293-PZK	1-1/8"	4616-00
ME25S293-PZK-HP	1-1/8"	4617-00

# Ball Valves

The Sporlan Ball Valve is a welded body joint that is factory tested to ensure positive leak-free performance.

## Features and Benefits:

- Welded body joint. Factory tested to ensure positive leak free performance.
- Full port sizes for unrestricted flow.
- Dual teflon seals to prevent leakage.
- Bottom loaded stem for safety.
- Design working pressure of 700 psi (49 bar).

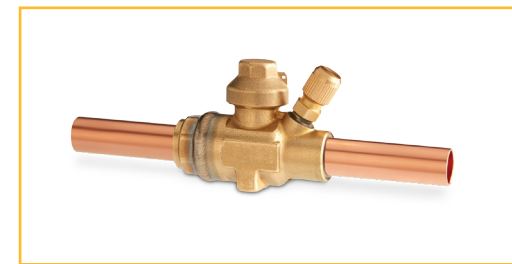

Description	Connection Size (ODM x ODM)	Part Number
EBVP-1023-PZK	1/4"	502159
EBVP-1033-PZK	3/8"	502160
EBVP-1043-PZK	1/2"	502161
EBVP-1053-PZK	5/8"	502162
EBVP-1063-PZK	3/4"	502163
EBVP-1073-PZK	7/8"	502164
EBVP-1093-PZK	1-1/8"	502165



[parker.com/zoomlock](http://parker.com/zoomlock)

P-532 / 52018