




## PRODUCT DATA SHEET

Ultra Lite 3-36® Ultra Thin Non Staining Lubricant, 11 Wt Oz  
Part Number: 03160

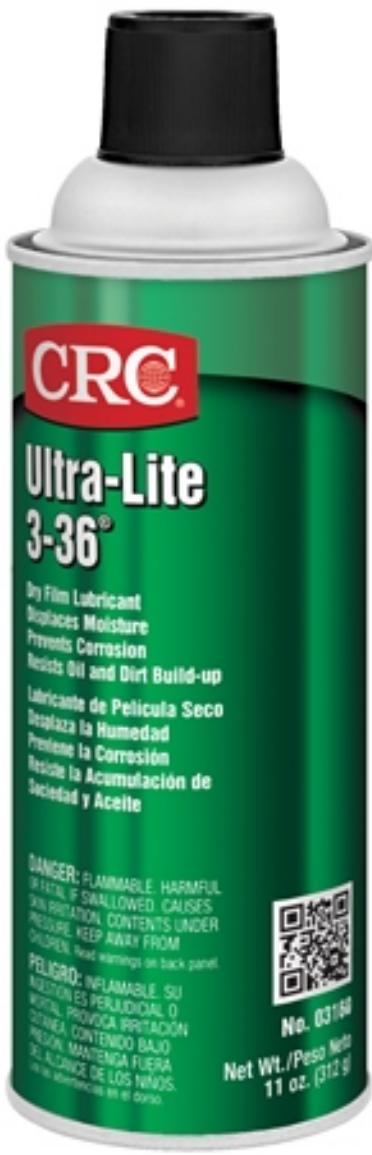

Product Description	Ultra-thin, non-staining lubricant that resists oil, dirt and dust build-up. Seals out moisture and prevents corrosion with protective film. Excellent for drying out electrical/electronic components.
Applications	Locks, latches, hinges, gauges, taps, dies, fixtures, fans, precision metal processing equipment, metal plating, coin mechanisms, solid work surfaces, clips, springs, control buttons, switches, bushings, window slides and rollers.
Unit Package Description	16 Ounce Aerosol
Brand	CRC
Generic Description 1	Ultra Thin Non Staining Lubricant
Net Fill	11 Wt Oz
UPC Code	078254031606
Unit Dimensions	7.75H x 2.63W x 2.63D in
Units Per Case	12
Case Dimensions	8.1H x 8.3W x 11.1D in
Cases Per Pallet	133
Case Weight	12 lbs
I 2 of 5 Code	30078254031607
Appearance	Amber Liquid
Base Type	Petroleum Solvent
Flash point (F)	172°F
Flash point (C)	78°C
Flammability Class - CPSC	Flammable
Spec Gravity Concentrate	0.8034
Plastic Safe	No
Film Type	Ultra Thin and Dry
Film Thickness	0.05 Mils
Evaporation Rate	Slow
Dielectric Strength	37,600 Volts

Last revised: 5/4/2016  
Page 1 of 2



Customer Care: 800-556-5074  
Technical Assistance: 800-521-3168  
[www.crcindustries.com](http://www.crcindustries.com)


CRC Industries is a worldwide leader in the production of specialty chemicals for maintenance and repair professionals serving industrial, electrical, aviation, automotive and marine markets. CRC is ISO 9001:2008 certified and adheres to the strictest guidelines for quality in all facets of research, development and production.



CRC®, K&W®, Sta-Lube®, Marykate® and products denoted with ® and ™ are trademarks of CRC Industries, Inc.



## PRODUCT DATA SHEET

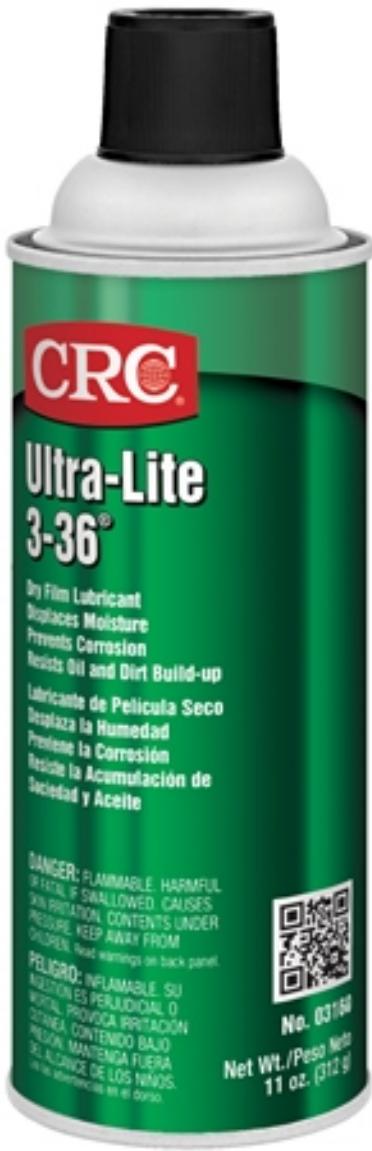

Working Temp (F)	-40 to 300°F
Working Temp (C)	-40 to 148.9°C
Propellant	Carbon Dioxide
NSF Category Code	H2
NSF Number	017425
Military Specification Number	Meets requirements of Mil-PRF-16173E, Grade 3 (Corrosion test only)
Aerosol Flammability Level	III
DOT Proper Shipping Name	Aerosols, Flammable, Limited Quantity
VOC % (Federal)	43.8
VOC g/L (Federal)	351.9
VOC Lbs./Gal. (Federal)	2.9
VOC Category	Dry Film Lubricant
Removal (How To)	Remove with petroleum solvents, Stoddard solvent or mineral spirits.

Last revised: 5/4/2016  
Page 2 of 2



Customer Care: 800-556-5074  
Technical Assistance: 800-521-3168  
[www.crcindustries.com](http://www.crcindustries.com)

CRC Industries is a worldwide leader in the production of specialty chemicals for maintenance and repair professionals serving industrial, electrical, aviation, automotive and marine markets. CRC is ISO 9001:2008 certified and adheres to the strictest guidelines for quality in all facets of research, development and production.



CRC®, K&W®, Sta-Lube®, Marykate® and products denoted with ® and ™ are trademarks of CRC Industries, Inc.