



LED MR16

8MR16/LED/840/F25/DIM 12V 10/1FB

Philips LED MR-16 lamps with single optic technology provide the look and color quality of traditional halogens while using a fraction of the energy. A perfect fit for spot lighting, they are compatible with most existing fixtures with MR16 GU5.3 holders and are designed as a retrofit replacement for halogen or incandescent spots.

Product data


General information		Wattage Equivalent	
Base	GU5.3 [GU5.3]	Starting Time (Nom)	0.5 s
EU RoHS compliant	Yes	Warm Up Time to 60% Light (Nom)	0.5 s
Nominal Lifetime (Nom)	25000 h	Power Factor (Nom)	0.7
Switching Cycle	50000	Voltage (Nom)	ac electronic 12 V
Light technical		Temperature	
Color Code	841 [CCT of 4100K (841)]	T-Case Maximum (Nom)	199.4 °F
Beam Angle (Nom)	25 °	Controls and dimming	
Initial lumen (Nom)	660 lm	Dimmable	Only with specific dimmers
Luminous Intensity (Nom)	3350 cd	Mechanical and housing	
Color Designation	Cool White (CW)	Bulb Finish	Clear
Correlated Color Temperature (Nom)	4000 K	Bulb Material	Aluminum
Luminous Efficacy (rated) (Nom)	82.00 lm/W	Bulb Shape	MR16 [2inch/50mm]
Color Consistency	<4	Approval and application	
Color Rendering Index (Nom)	80	Suitable For Accent Lighting	Yes
LLMF At End Of Nominal Lifetime (Nom)	70 %	Energy Certifications	Energy Star
Operating and electrical			
Input Frequency	- Hz		
Power (Rated) (Nom)	8 W		
Lamp Current (Nom)	720 mA		

LED MR16

Product data	
Order product name	8MR16/LED/840/F25/DIM 12V 10/1FB
EAN/UPC - Product	046677573928
Order code	573923
Numerator - Quantity Per Pack	1

Numerator - Packs per outer box	10
Material Nr. (12NC)	929003076604
Net Weight (Piece)	0.132 lb


Dimensional drawing

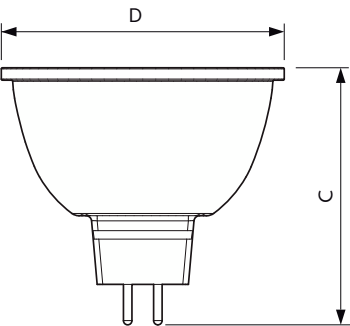


8MR16/LED/840/F25/DIM 12V 10/1FB

Product	D	C
8MR16/LED/840/F25/DIM 12V 10/1FB	2 in	1-7/8 in


Photometric data

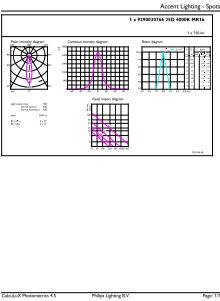

LEDspots DIM IC 8W MR16 GU5,3 840 25D-ADL



LEDspots DIM IC 8W MR16 GU5,3 840 25D-LDD

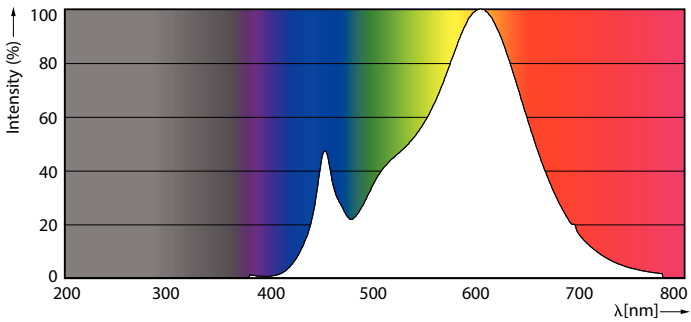

LEDspots DIM IC 8W MR16 GU5,3 840 35D-POC

LED MR16

Lifetime



Life Expectancy Diagram



Lumen Maintenance Diagram

