


PureFlow Crimp

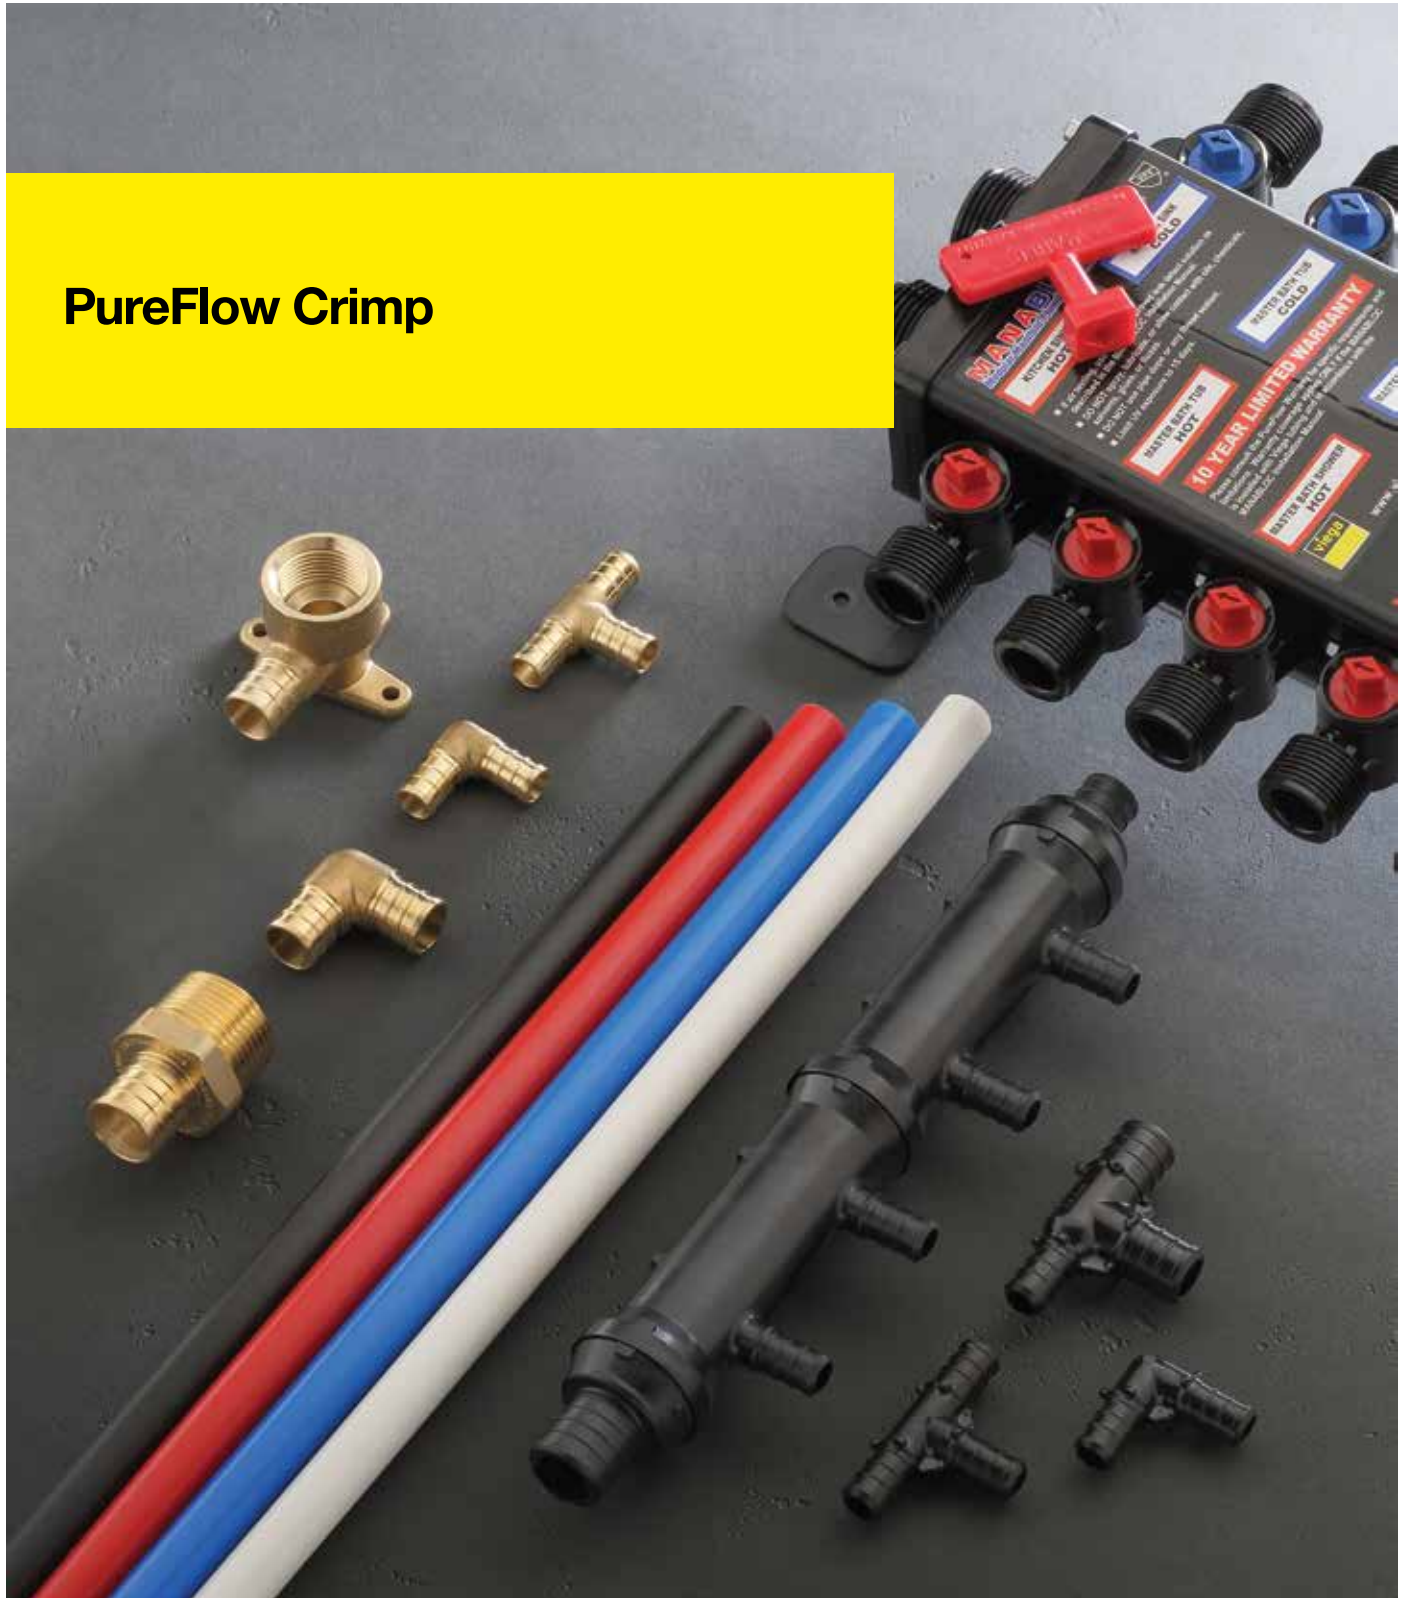

PureFlow Crimp

With the reliability and quality required for potable water, Viega PureFlow Crimp fittings are part of Viega's complete plumbing solution. Matched with the revolutionary Viega ManaBloc water distribution system and the highest-rated PEX tubing in the industry (according to industry standards), Viega PureFlow Crimp fittings are a time-tested method for joining PEX.

FEATURES AND BENEFITS

- EcoBrass fittings provide better corrosion resistance than other brass fittings
- High-performance polyalloy fittings are made in the USA
- Peace of mind from durable materials and quality manufacturing
- Available in sizes $\frac{3}{8}$ " to 1"
- 25-year limited warranty

CODES AND STANDARDS

- CSA B214: Installation Code for Hydronic Heating Systems
- IAPMO: California Plumbing Code (CPC)
- IAPMO: National Standard Plumbing Code (NSPC)
- IAPMO: Uniform Mechanical Code (UMC)
- IAPMO: Uniform Plumbing Code (UPC)
- IAPMO: Uniform Solar, Hydronics and Geothermal Code (USHGC)
- ICC: International Mechanical Code (IMC)
- ICC: International Plumbing Code (IPC)
- ICC: International Residential Code (IRC)
- National Building Code of Canada (NBCC)
- National Plumbing Code of Canada (NPCC)

LISTINGS AND CERTIFICATIONS

- ASTM E84: Standard Test Method for Surface Burning Characteristics of Building Materials
- ASTM F876: Standard Specification for Cross-linked Polyethylene (PEX) Tubing
- ASTM F877: Standard Specification for Cross-linked Polyethylene (PEX) Water Distribution System
- ASTM F1807/F2159: Standard Specification for Cross-linked Polyethylene (PEX) Insert Fittings
- ASTM F2023: Standard Test Method for Evaluating the Oxidative Resistance of Cross-linked Polyethylene PEX Tubing and Systems to Hot Chlorinated Water
- AWWA C904: Cross-linked Polyethylene (PEX) Pressure Pipe for Water Service
- CAN/ULC S101: Standard Method of Test for Surface Burning Characteristics
- CAN/ULC S102.2: Standard Method of Test for Surface Burning Characteristics of Flooring, Floor Coverings, and Miscellaneous Materials and Assemblies
- CSA B137.5: Standard Specification for PEX Tubing Systems in Pressure Applications
- HUD MR1276: Housing and Urban Development Materials Release
- IAPMO file 3700 (Potable Water Distribution Manifold)
- IAPMO file 4030 Cross-linked Polyethylene Water Distribution System (PEX)
- IAPMO file 4874 (FostaPEX)
- ICC-ES PMG-1038 (PureFlow)
- NSF/ANSI 14: Plastics Piping System Components and Related Materials
- NSF/ANSI/CAN 61: Drinking Water Systems Components – Health Effects

- NSF/ANSI 372: Drinking Water Systems Components – Lead Content
- UL 1821: Thermoplastic Sprinkler Pipe and Fittings for Fire Protection Service
- UL 2846: Fire Test of Plastic Water Distribution Plumbing Pipe for Visible Flame and Smoke Characteristics

ZERO LEAD

References to Zero Lead throughout this publication mean products meet the requirements of both NSF/ANSI 372 ($\leq 0.25\%$ maximum weighted average lead content) and NSF/ANSI/CAN 61.

NOTE

Crimp rings are not sold with any PureFlow Crimp product unless otherwise specified.



Viega PureFlow Crimp 90° elbow
 - Copper
 - Crimp connection, female copper tube size
Model V5021

Crimp	C	Wt [lb]	Quantity	Part No	DG
1/2	1/2	0.048	50	44325	2
3/4	3/4	0.111	25	44345	2



Viega PureFlow Crimp 90° elbow
 - Copper
 - Crimp connection, street
Model V5020

Crimp	FTG (CTS)	Wt [lb]	Quantity	Part No	DG
1/2	1/2	0.045	50	44320	2
3/4	3/4	0.094	25	44340	2

FTG (CTS) = TEST

Tees



Viega PureFlow Crimp tee
Zero Lead
 - Brass
 - Crimp connection
Model V5018ZL

Crimp1	Crimp2	Crimp3	Wt [lb]	Quantity	Part No	DG
3/8	3/8	3/8	0.062	50	46500	2
1/2	1/2	1/2	0.057	50	46520	2
1/2	1/2	3/4	0.103	25	46524	2
3/4	1/2	1/2	0.103	25	46433	2
3/4	1/2	3/4	0.101	25	46435	2
3/4	3/4	1/2	0.102	25	46443	2
3/4	3/4	3/4	0.100	25	46540	2
3/4	3/4	1	0.196	10	46445	2
1	3/4	3/4	0.179	10	46544	2
1	3/4	1	0.164	10	46545	2
1	1	1/2	0.161	10	46553	2
1	1	3/4	0.161	10	46554	2
1	1	1	0.174	10	46560	2



Viega PureFlow Crimp tee
 - PolyAlloy
 - Crimp connection
Model V5218

Crimp1	Crimp2	Crimp3	Wt [lb]	Quantity	Part No	DG
3/8	3/8	3/8	0.010	50	43500	3
1/2	1/2	1/2	0.014	50	43520	3
1/2	1/2	3/4	0.019	25	43334	3
3/4	1/2	1/2	0.021	25	43433	3
3/4	1/2	3/4	0.026	25	43434	3
3/4	3/4	1/2	0.023	25	43443	3
3/4	3/4	3/4	0.029	25	43540	3
3/4	3/4	1	0.038	10	43445	3
1	3/4	3/4	0.047	10	43544	3
1	3/4	1	0.054	10	43545	3
1	1	1/2	0.043	10	43553	3
1	1	3/4	0.046	10	43554	3
1	1	1	0.050	10	43560	3

Adapters



Viega PureFlow Crimp adapter
Zero Lead
 - Brass
 - Crimp connection, male pipe thread
Model V5011ZL

Crimp	MPT	Wt [lb]	Quantity	Part No	DG
3/8	1/2	0.102	50	46302	2
1/2	1/2	0.101	50	46321	2
1/2	3/4	0.141	25	46324	2
3/4	1/2	0.096	25	46342	2
3/4	3/4	0.147	25	46340	2
3/4	1	0.216	10	46446	2
1	3/4	0.155	10	46361	2
1	1	0.236	10	46366	2



Viega PureFlow Crimp adapter
Zero Lead
 - Brass
 - Crimp connection, female pipe thread
Model V5012ZL

Crimp	FPT	Wt [lb]	Quantity	Part No	DG
3/8	1/2	0.094	25	46323	2
1/2	1/2	0.090	25	46333	2
1/2	3/4	0.143	25	46334	2
3/4	3/4	0.147	25	46344	2
3/4	1	1.585	10	46345	2
1	1	0.234	10	46355	2