


**Van Stone Flange\*\***

S

PVC PART NO. 8530

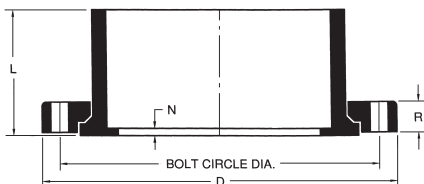

Size	Universal Part Number	D	L	N	R
1½	854-015	4 <sup>15</sup> / <sub>16</sub>	1 <sup>9</sup> / <sub>16</sub>	3/ <sub>32</sub>	23/ <sub>32</sub>
2	854-020	5 <sup>7</sup> / <sub>8</sub>	1 <sup>23</sup> / <sub>32</sub>	3/ <sub>32</sub>	13/ <sub>16</sub>
2½	854-025	6 <sup>11</sup> / <sub>16</sub>	1 <sup>31</sup> / <sub>32</sub>	1/ <sub>8</sub>	29/ <sub>32</sub>
3	854-030	7 <sup>7</sup> / <sub>16</sub>	2 <sup>1</sup> / <sub>8</sub>	1/ <sub>8</sub>	29/ <sub>32</sub>
4	854-040	9 <sup>1</sup> / <sub>32</sub>	2 <sup>5</sup> / <sub>8</sub>	1/ <sub>8</sub>	1 <sup>1</sup> / <sub>16</sub>
6	854-060	10 <sup>31</sup> / <sub>32</sub>	3 <sup>7</sup> / <sub>32</sub>	1/ <sub>8</sub>	1 <sup>7</sup> / <sub>32</sub>
8	854-080	13 <sup>11</sup> / <sub>32</sub>	4 <sup>5</sup> / <sub>16</sub>	3/ <sub>16</sub>	1 <sup>1</sup> / <sub>2</sub>
10	854-100	16	5 <sup>11</sup> / <sub>16</sub>	5/ <sub>8</sub>	1 <sup>11</sup> / <sub>16</sub>
12	854-120	19	7 <sup>5</sup> / <sub>16</sub>	9/ <sub>16</sub>	1 <sup>11</sup> / <sub>16</sub>

Size	BOLT CIRCLE DIA.	BOLT HOLE DIA.	NO. OF BOLT HOLES	BOLT DIA.	MIN. BOLT LENGTH*	Approx. Wt. (Lbs.)
1½	3 <sup>7</sup> / <sub>8</sub>	5/ <sub>8</sub>	4	1/ <sub>2</sub>	2 <sup>1</sup> / <sub>2</sub>	0.54
2	4 <sup>3</sup> / <sub>4</sub>	3/ <sub>4</sub>	4	5/ <sub>8</sub>	3	0.84
2½	5 <sup>1</sup> / <sub>2</sub>	3/ <sub>4</sub>	4	5/ <sub>8</sub>	3 <sup>1</sup> / <sub>4</sub>	1.27
3	6 <sup>5</sup> / <sub>8</sub>	3/ <sub>4</sub>	4	5/ <sub>8</sub>	3 <sup>1</sup> / <sub>4</sub>	1.55
4	7 <sup>1</sup> / <sub>2</sub>	3/ <sub>4</sub>	8	5/ <sub>8</sub>	3 <sup>1</sup> / <sub>2</sub>	2.71
6	9 <sup>1</sup> / <sub>2</sub>	3 <sup>1</sup> / <sub>32</sub>	8	3/ <sub>4</sub>	4	3.88
8	11 <sup>3</sup> / <sub>4</sub>	29/ <sub>32</sub>	8	3/ <sub>4</sub>	4 <sup>1</sup> / <sub>2</sub>	7.21
10	14 <sup>1</sup> / <sub>4</sub>	1	12	7/ <sub>8</sub>	5	12.59
12	17	1	12	7/ <sub>8</sub>	5	20.74

\* BOLT LENGTHS WERE CALCULATED USING TWO CHARLOTTE FLANGES.  
 LENGTHS MAY VARY WHEN MATING WITH OTHER BRANDS OR ACCESSORIES.

\*\* THE MAXIMUM WORKING PRESSURE IS 150 PSI AT 73°F.