NQ442L2

Panelboard interior, NQ, main lugs, 225A, Al bus, 42 pole spaces, 3 phase, 4 wire, 240VAC, 48VDC





Main

Main	
Panelboard Type	Main lugs
Product or component type	Interiors
Branch Circuit Breaker Type	QOB QOB-VH QHB
Busbar Material	Aluminium

Complementary

Number of spaces	42		
Enclosure Nominal Height	38 in (965.20 mm)		
Enclosure Nominal Width	20 in (508.00 mm)		
Enclosure Nominal Depth	5.75 In (146.05 mm) NEMA 1 6.5 in (165.10 mm) NEMA 3R/5/12		
Line Rated Current	225 A		
[lu] rated interrupted current	10 KA 22 KA 65 kA		
Wiring configuration	4-wire		
Number of Phases	3 phase		
Voltage Rating	240 V AC 48 V DC		
Connections - terminals	Lug line AWG 6350 kcmil aluminium Lug neutral AWG 6350 kcmil aluminium		
Tightening torque	40.0150.01 Lbf.In (4.525.65 N.m) 0.020.10 in² (13.3067.43 mm²) (AWG 6AWG 2/0) 100.01 Lbf.In (11.3 N.m) 0.020.10 in² (13.3067.43 mm²) (AWG 6AWG 2/0) 274.99 Lbf.In (31.07 N.m) 0.020.27 in² (13.30177.3 mm²) (AWG 6350 kcmil) 274.99 Lbf.In (31.07 N.m) 0.020.20 in² (13.30126.7 mm²) (AWG 6250 kcmil) 274.99 lbf.in (31.07 N.m) 0.170.24 in² (107.2152 mm²) (AWG 4300 kcmil)		
Height	33.00 in (838.20 mm)		
Width	10.44 in (265.18 mm)		
Net weight	17.17 lb(US) (7.79 kg)		

Environment

Standards	CSA	
	UL	

Ordering and shipping details

Category	09151 - NQ RTA PANELBOARDS	
Discount Schedule	PE1A	
GTIN	00785901507864	
Nbr. of units in pkg.	1	
Package weight(Lbs)	18.2 lb(US) (8.26 kg)	
Returnability	Yes	
Country of origin	MX	

Packing Units

Package 1 Height	6.30 in (16.002 cm)
Package 1 width	14.00 in (35.560 cm)
Package 1 Length	38.30 in (97.282 cm)


Offer Sustainability

oner odetamasmy			
Sustainable offer status	Green Premium product WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Bisphenol A (BPA), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov		
California proposition 65			
REACh Regulation	REACh Declaration		
REACh free of SVHC	Yes		
EU RoHS Directive	Compliant EEU RoHS Declaration		
Toxic heavy metal free	Yes		
Mercury free	Yes		
RoHS exemption information	₽¥Yes		
China RoHS Regulation	China RoHS Declaration		
Environmental Disclosure	Product Environmental Profile		

Contractual warranty

Warranty	18 months
----------	-----------

Approximate Dimensions

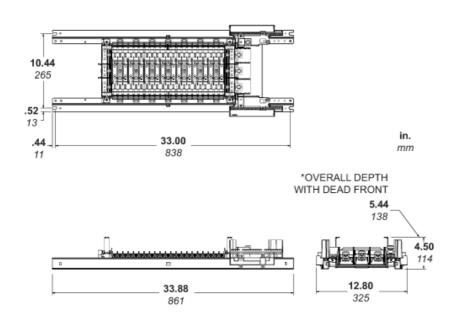

Catalog	Phase/Wire	Bus Thickness	Bus Material	Lug Size
NQ442L2C	3P 4W	.25	CU	#6-350 KCMIL
NQ42L2C	1P 3W	.25	CU	#6-350 KCMIL
NQ442L2	3P 4W	.25	AL	#6-350 KCMIL
NQ42L2	1P 3W	.25	AL	#6-350 KCMIL