


PIPE & CONDUIT CLAMPS

Finish: Electro-galvanized Order By: No., and Finish




PS 1000 – EMT Conduit Clamp

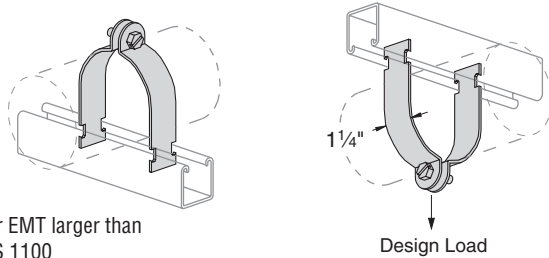

Note: For EMT larger than 2" use PS 1100


EMT Size	Stock Thickness	Hanging Load Rating/lbs.	Wt./100 pcs
1/2"	.060	400	11
3/4"			12
1"	.075	600	15
1 1/4"			18
1 1/2"	.105	800	29
2"			33

PS 1300 – Universal Clamp for EMT, IMC & GRC

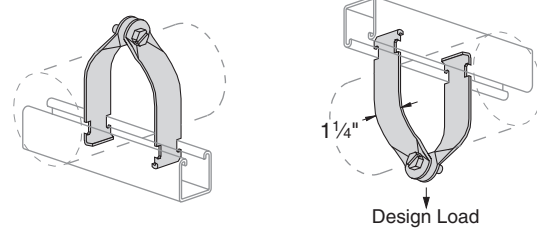

Nominal Size	Fits O.D.	Stock Thickness	Hanging Load Rating/lbs.	Wt./100 pcs
1/2"	0.706-0.840	.060	250	10
3/4"	0.922-1.050	.060	400	11
1"	1.163-1.315			12
1 1/4"	1.510-1.660	.075	400	18
1 1/2"	1.740-1.900	.075	500	20
2"	2.197-2.375			22

PS 1100, PS 1116, PS 1117 – Standard Pipe Clamp (GRC, IMC and SCH 40/SCH 80 steel pipe)

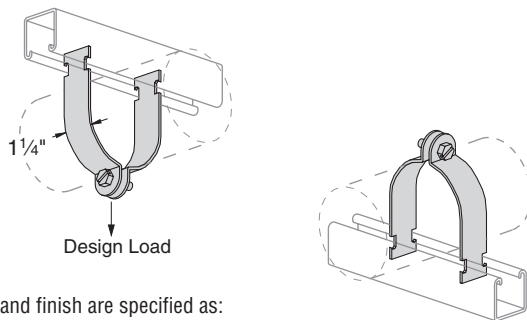

Material and finish are specified as:

1100 AL Alum. clamp, EG fasteners

1100 HG Clamp, Stainless Steel fasteners


1116 Alum. clamp and fasteners

1117 Alum. clamp, Stainless Steel fasteners

1100SS Stainless Steel clamp and fasteners

Pipe Size	Stock Thickness	Hanging Load Rating/lbs.	Wt./100 pcs
3/8"	.060	400	10
1/2"			11
3/4"	.075	600	15
1"			17
1 1/4"	.105	800	19
1 1/2"			29
2"	.125	1,000	34
2 1/2"			40
3"	.135	1,000	47
3 1/2"			62
4"	.125	1,000	67
5"			80
6"	.135	1,000	102
8"			130
10"	.135	1,000	143
12"			174

PS 67 – "J" Pipe or Conduit Hanger

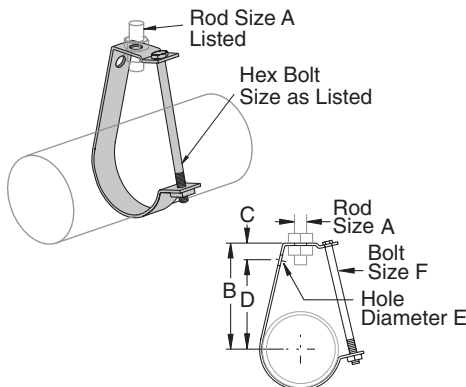

Notes:

Plastic Coated hanger is available ("N" Suffix). Please contact factory for additional information.

Maximum operating temperature is 300°F

Minimum safety factor of five (5) on ultimate load.

Conduit Size	A Rod Size	B	C	D	E	F	Load Rating/lbs.	Wt./100 pcs
1/2"	3/8	2 5/8	1	2	1 3/32	1/4 x 2 1/4	400	20
3/4"		2 7/8		2 1/4		1/4 x 2 1/2		21
1"		3		2 3/8		1/4 x 2 3/4		24
1 1/4"		3 1/4		2 1/2		1/4 x 3		27
1 1/2"	1/2	3 1/2	1 1/8	2 5/8	9/16	1/4 x 3 1/2	800	29
2"		3 3/4		2 5/8		3/8 x 4 1/2		33
2 1/2"		4 3/8		3 5/8		3/8 x 5		71
3"		4 7/8		4		3/8 x 6		78
3 1/2"	5/8	5 1/8	1 1/4	4 1/4	5/8	3/8 x 7 1/2	1,000	85
4"		6 1/8		5 1/8		3/8 x 8 1/2		178
5"		6 3/4		5 3/4		3/8 x 10		199
6"		7 3/4		6 1/2		3/8 x 10		231
8"	7 1/8	9 1/4	1 1/4	8			1,200	449