


# BEAM CLAMPS

**Finish:** Painted Green, or Electro-galvanized **Order By:** No. and Finish **Note:** Use in pairs or with other support




## PS 686 – Beam Clamp

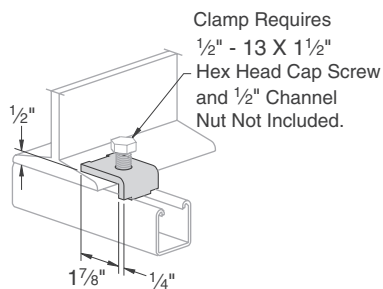


**Load Rating:**  
Use in pairs only  
600 lbs. with 12 ga. channel  
500 lbs. with 14 ga. channel  
Weight/100 pcs: 26 lbs.


## PS 684 – “I” Beam Clamp

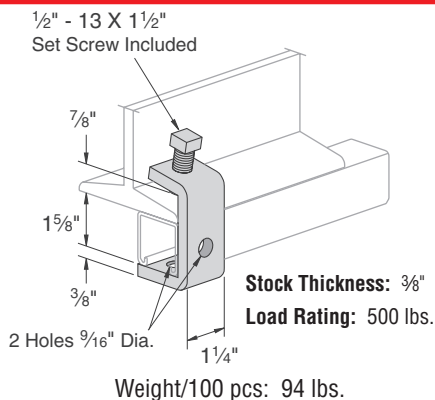

## PS 916 – “I” Beam Clamp

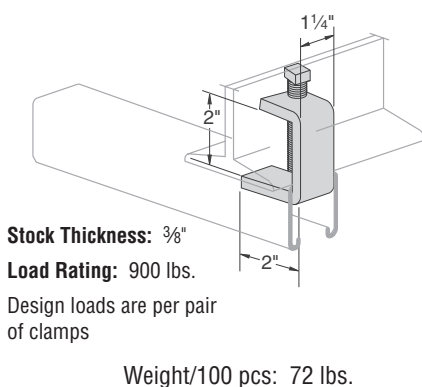


## PS 2624 – Wood Beam Hanger

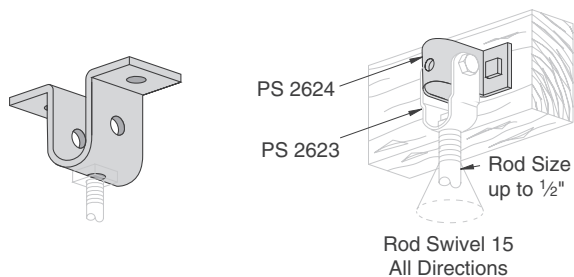


Weight/100 pcs: 22 lbs.

## PS 2653 – Purlin Clamp



Part No.	Use With	Load Rating	Wt./100 pcs.
PS 2653 T1	PS 200, PS 210, PS 300	1,200	175
PS 2653 T2	PS 100, PS 150, PS 200 2T3		179
PS 2653 T3	PS 100 2T3		179

## PS 907, PS 998 – “I” Beam Clamp




Part No.	Stock Thickness	Set Screw	Load Rating lbs.	Wt./100 pcs.
PS 907	1/4 inch	3/8 inch	450	26
PS 998	3/8 inch	1/2 inch	1,000	64

Load rating is based on 2 clamps  
Use in pairs only


Maximum flange thickness is 1 inch

## PS 736 – Hook Rod Assembly

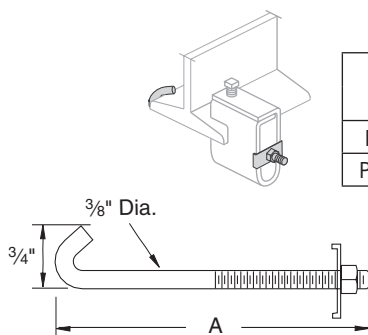

Part No.	Flange Width		A Size	Wt./100 pcs
	Max	Min		
PS 736 J6	7 inch	3 inch	8 5/8 inch	24
PS 736 J10	11 inch	7 inch	12 5/8 inch	33

## PS 2622 – Beam Clamp



Assembly including PS 736 also available.

Order PS 2622/J6 or PS 2622/J10

**Load Rating:** 300 lbs.

**Note:**  
Adaptable for 1/4 inch, 3/8 inch & 1/2 inch rod with PS 3201.

Weight/100 pcs: 41 lbs.